

Teramind Rules Guide

Version 2.0 (24 MAY 2022)



Table of Contents

1	About This Guide	4
2	Related Resources	5
3	Rules Overview	6
3.1	Common Use Cases.....	7
3.1.1	Preventing Data Loss	7
3.1.2	Detecting Insider Threats	7
3.1.3	Identifying Abusive Behavior and Accidental Threats.....	7
3.1.4	Detecting Malicious Intent	8
3.1.5	Improving Productivity and HR Management.....	8
3.1.6	Conforming with Regulatory Compliance	8
4	Steps for Creating a Rule	10
4.1	Why are You Creating the Rule?	10
4.2	What Activity, Content or Behavioral Anomaly You Want to Detect?	10
4.3	Where is the Activity Performed or Content Located?.....	10
4.4	When Should the Rule be Active?.....	10
4.5	Whom Should it Apply to?	10
4.6	What Makes the Data Sensitive?	11
4.7	What Scenarios Violate the Rule?.....	11
4.8	What Action(s) Do You Want to Take?	11
5	Understanding Common Rule Elements	12
5.1	Rule Name and Description	12
5.2	Tags	12
5.3	Schedule.....	12
5.4	Rule Conditions	13
5.5	Rule Logic	14
5.5.1	Condition Logic.....	14
5.5.2	Content Logic.....	14
5.6	Risk Level.....	15
5.6.1	Setting the Risk Levels in a Regular Rule	16
5.6.2	Setting the Risk Level in an Anomaly Rule.....	17
5.7	Rule Summary	17

6	Creating Regular Rules	18
6.1	Setting Up the Rule Basics	18
6.2	Selecting Rule Categories and Types	18
6.3	Defining Users	19
6.4	Defining Detection Criteria	20
	6.4.1 Agent Schedule Rules: What Schedule Violations Can You Detect?	20
	6.4.2 Activity Rules: What Activities Can You Detect?	24
	6.4.3 Content Sharing Rules: What Contents Trigger the Rules?	50
7	Creating Anomaly Rules	65
7.1	Rule Examples	65
7.2	Setting Up the Rule Basics	65
7.3	Detection Criteria - What Behavioral Anomalies Trigger the Rules?	66
8	Defining Rule Actions	70
8.1	Customizing the Rule Messages and Alerts	73
	8.1.1 Configuring the Alert Template	74
	8.1.2 Changing the Email Notification Settings	74
	8.1.3 Changing the Alert Wait Time	75
	8.1.4 Changing the Alert Log Limit	75
	8.1.5 Changing the Task Selection Timeout	75
9	Using the Prebuilt Rule-Templates	76
	9.1.1 Using the Regular Rule Templates	76
	9.1.2 Using Anomaly Rule Templates	76
10	Enforcing the Rules	78
10.1	Automatic Enforcement	78
10.2	Manual Enforcement	78
11	Investigating the Rule Violation Incidents	80
11.1	Using the Alerts Report & the Alerts Log Widget	80
11.2	Using the Session Player	81
11.3	Using the Risk Report & the Risk Widget	82
12	Sample Rules Walkthrough	83
12.1	Rule Sample 1: User logs in during off hours	84
	12.1.1 Rule Summary	84
	12.1.2 Setting up the Rule	84

12.1.3	Viewing the Rule Alerts	85
12.1.4	Viewing the Session Recording.....	86
12.2	Rule Sample 2: User sending emails with attachments to non-business address.....	87
12.2.1	Rule Summary	87
12.2.2	Setting up the Rule	87
12.2.3	Viewing the Rule Alerts	89
12.2.4	Viewing the Session Recording.....	89
12.3	Rule Sample 3: User attempting to upload a sensitive file to a cloud drive	90
12.3.1	Rule Summary	90
12.3.2	Setting up the Rule	90
12.3.3	Viewing the Rule Alerts	92
12.3.4	Viewing the Session Recording.....	92
12.4	Sample Rule 4: User attempting to share files containing sensitive content	93
12.4.1	Rule Summary	93
12.4.2	Setting up the Rule	93
12.4.3	Viewing the Rule Alerts	94
12.4.4	Viewing the Session Recording.....	95
12.5	Sample Rule 5: Employee productivity anomaly	95
12.5.1	Rule Summary	95
12.5.2	Setting up the Rule	96
12.5.3	Viewing the Rule Alerts	97
12.5.4	Viewing the Session Recording.....	97
13	Appendix	97
13.1	List of Prebuilt Rule Templates	98
13.2	List of Prebuilt Anomaly Rule Templates	99
13.3	List of Pre-Defined Classified Data	99

1 About This Guide

This guide explains how to utilize Teramind's behavioral based rules to detect insider threats, protect your organization from malicious or accidental security incidents, prevent data loss or to conform with regulatory compliances. The guide explains rule structures, conditions, logic, data types etc. It shows you the steps for creating a rule, their uses cases, best practices and advanced capabilities.

The guide is designed for the managers, administrators and security personnel who are responsible for configuring and maintaining the Teramind solution in your organization.

2 Related Resources

- [Teramind User Guide](#) –contains detailed explanation of Teramind’s user interface. It’s also an excellent reference manual that can help you quickly locate information or show you how to use Teramind on a day to day basis. The Rules Guide contains context sensitive links to relevant sections on the Teramind User Guide where needed.
- [Teramind Knowledge Base](#) – contains web versions of the Rules Guide, User Guide, How-To Articles, Deployment Guides, FAQ and other resources.
- **Guided Tour** – Teramind has an interactive tour feature with over a hundred use-cases. You can use this feature to learn how to utilize Teramind features and capabilities and see how some of the common rules work. Click the  button at the top-right corner of the Teramind Dashboard to access the Guided Tour feature.

3 Rules Overview

Behavioral rules are a core part of Teramind's automated insider threats detection and data loss prevention capabilities. They allow you to identify unproductive, harmful or dangerous activity in real-time and optionally, act on your behalf to thwart such threats. The Intelligent Rules Engine is tightly integrated throughout Teramind platform:

- The Rules Engine utilizes Teramind's granular Activity Monitoring (using the [BI Reports](#)) capabilities, such as: apps, websites, emails etc. to determine what activity or content the rule should detect.
- It uses the [User Profiles](#) to determine whom the rule will apply to.
- You can use the Configurations settings to supply additional inputs such as employee [Schedule](#), [Shared List](#) etc. for use with the [Rules Editor](#) to speedup the rule creation process and to share parameters across different rules.
- You can use the [Monitoring Settings](#) to control when and how the rule should work, minimizing privacy concerns.
- You can get detailed report of the rule violation incidents and associated risks on the [BI Reports > Behavior Alerts](#), view recordings and gather evidence from the [Session Player](#) and get notified with the [Rule Notification Emails](#).
- [Teramind Agent](#) enforces the rules you create from the Teramind Dashboard on the user's computer.

With hundreds of pre-built rule templates, pre-defined data categories and sample rules, you can get started with Teramind right away. You can create your own rules very easily with an intuitive, visual Rules Editor. The editor allows you to use natural language, regular expressions, shared list and pre-built data classifications to define what makes an activity or data sensitive and use simple conditions that will trigger a rule violation incident. When a rule is violated, you can be notified about the incident and optionally, the system can take actions automatically in different ways, such as: warning the user, blocking the activity etc.

Teramind keeps detailed records of each rule violation incident complete with detailed information and relevant metadata. You can see the rule violations report from the Alerts screen and quickly search for an incident.

Teramind also captures video and optionally, audio for a rule violation incident. You can view the recordings with the Session Player. The player allows you to see what rule notifications the user received and the trail of activities leading up to the incident. You can also export recordings for evidence or forensic investigation purposes. These recordings are automatically analyzed and index by Teramind's advanced OCR-engine. You can conduct high-speed [OCR search](#) for on-screen content or create [OCR-based rules](#) that will activate whenever certain text is detected on the screen, in real-time.

You can conduct risk analysis and identify high risk rules, users or objects from the Risk report. This also gives you ideas on how to adjust your rules' detection settings to focus on key areas of vulnerabilities or reduce false positives.

Finally, you can get scheduled delivery of rule violation reports or 'just-in-time' notifications in your inbox with the Email Notifications feature.

3.1 Common Use Cases

3.1.1 Preventing Data Loss

- Uploading documents that contain sensitive data to personal Cloud drives.
- Sharing documents outside the organization that has a confidential watermark.
- Sending out emails with sensitive files to non-corporate emails.
- Sending out emails with large attachments, too many attachments or zipped files.
- Printing during irregular hours.
- Printing a large number of sensitive documents.
- Taking screenshots, using screen capture or snipping tools.
- Copying CRM data and pasting it in emails, an external site or in an unauthorized application.
- Non-authorized use of Cloud sharing drives as an attempt to exfiltrate data.
- Saving files on a removable media.
- Sharing files with protected properties such as Tags, Attribute, Document Category etc.
- Employees communicating with competitors.

3.1.2 Detecting Insider Threats

- Sign of discontent, harassment, legal threats or other sentiment in emails or IM chats indicating underlying issues.
- Development team using production data for testing and development.
- IT department storing authentication information such as credit card magnetic data which is prohibited under compliance laws.
- Accessing internet from restricted servers.
- Installing RDP clients or opening ports.
- User entering sensitive data such as passwords or personal details on potentially harmful or phishing sites.
- Employee using the browser's incognito/private mode frequently.
- Clearing browser history or deleting cache files.
- Sudden change in schedules or work pattern.
- Using code snippets in database queries.
- A vendor attempting to bypass security clearances and gain additional access by exploiting a bug, design flaw or configuration oversight in an operating system or software application.
- Contractor attempting to log in to database servers during off-hours or after the completion of a project.
- External user or freelancer accessing confidential customer and employee records.

3.1.3 Identifying Abusive Behavior and Accidental Threats

- Employees looking at materials online that are questionable, suspicious or otherwise dangerous. For example, hacking sites, pornography or piracy content.
- Abusing company resources, such as, printing unnecessary copies of documents, throttling the network etc.

- Customer agent asking for credit card numbers in unsecure email or support chat without using the proper communications channel.
- Sharing 'not for the public' files on social media or IMs.
- Employee opening emails that contain phishing links, viruses or malwares.
- Installing browser plugins that aren't secure or known to be problematic.
- Entering passwords or personal details in unsecure websites.

3.1.4 Detecting Malicious Intent

- Unauthorized user reading a document they should not have access to.
- User trying to hide information in an image.
- Employee participating in insider trading by sharing embargoed information such as M&A documents.
- Searching the internet for suspicious keywords and phrases, such as: 'how to disable firewall', 'recover password', 'steganography' etc.
- Running the Tor browser or accessing the darknet sites.
- Attempting to bypass the proxy server.
- Installing VPN client.
- Running network snoopers, registry editor or other dangerous applications.
- Running password crackers, keyloggers or other malicious tools.
- Running software from external media or Cloud services.
- Changing the configuration of the network or system settings.
- Opening up blocked ports in the router settings.
- RDP connection attempts to forbidden hosts or unauthorized use of RDP applications.
- Performing IT sabotage by deleting user accounts, files or directories.
- Sharing source codes outside the development team.
- Creating back-door accounts or fake user credentials.

3.1.5 Improving Productivity and HR Management

- Get notified when workers spending too much time on Facebook, watching YouTube videos or surfing online shopping sites.
- Flag when employees idling too much, coming to work late, frequently absent etc.
- Warn employees when they are spending excess time on personal tasks such as applying for jobs.
- Using applications or sites that are unproductive.
- Not following prescribed policy when dealing with customers.
- Not following corporate etiquette policy, for example, visiting gambling sites.
- Contractor submitting invoices that do not match work hours or task completion status.

3.1.6 Conforming with Regulatory Compliance

- Prevent exfiltration of PHI (Protected Health Information) such as EHR, FDA recognized drug names, ICD codes, NHS numbers etc. to comply with HIPAA and HITECH policies (HIPAA 164.500 - 164.532).

- Automatically log-out user when inactive for certain time (HIPAA 174.312).
- Block unauthorized traffic from EHR/EMR and clinical applications (HIPAA 164.306).
- Restrict access based on a user's 'need to know' clearance. For example, block IT admins from accessing cardholder data while performing support tasks (PCI-DSS 10.1).
- Use OCR-based rules to detect when user has access to full view of a PAN (Personal Account Number) violating *PAN-masking* or *PAN-unreadable* rules (PCI-DSS 3.4/3.5).
- Block file-write operation when credit card numbers or magnetic track data is detected that would violate the *storing of authentication data* rule (PCI-DSS 3.2).
- Prevent sharing of contact list containing EU PII (personally identifiable information) such as English names, EU addresses or EU phone numbers (GDPR 5).
- Warn user when sharing files containing data such as DNA profile, NHS/NI number and sexual orientation data, hence preventing the violation of *processing of special categories of personal data rule* (GDPR 9).
- Ensure that non-EU admins cannot access the records of EU employees preventing the violation of *transfers of personal data to third countries* rule (GDPR 44).
- Enforce security-compliant behavior and take immediate action on detection of anomalies or rule violations and train employees with detailed rule-alerts (ISO 27001, Standard Enforcement).

4 Steps for Creating a Rule

4.1 Why are You Creating the Rule?

Consider what you are trying to achieve. Do you want to monitor users' activities to prevent insider threats? Suspicious that an employee is committing a crime or colluding with an outsider? Or, are you trying to prevent IP leaks through external vendors? Do you need to comply with regulations, such as: HIPAA, GDPR etc.?

Create a **new policy** or assign it under an existing policy that fits the rule's purpose.

4.2 What Activity, Content or Behavioral Anomaly You Want to Detect?

Are you trying to detect discrepancies in employees' schedule? Does it involve an 'activity' such as, uploading a document? Or do you need to protect some 'content' such as, sensitive information inside a document?

Select a **Rule Type** from the Rules Editor's *General* tab.

If you are trying to detect behavioral anomalies such as an employee sending abnormal amount of emails than normal, then you should consider creating an anomaly rule.

Create an anomaly rule from the **Behavior > Anomaly** rule menu.

4.3 Where is the Activity Performed or Content Located?

Next you need to figure out where the activity or content sharing takes place. Does it involve emails? Transfer of files? Or, are there multiple ingress/egress points that you need to monitor, for example, emails + IM + website uploads?

Select **Types of Activities** or **Types of Contents** from the Rules Editor's *General* tab.

4.4 When Should the Rule be Active?

Do you want the rule to run 24/7 or follow a schedule? For example, do you want the rule active during work hours but disable it during the employee lunch breaks?

You can turn rules on/off from the **Behavior** menu.

Or, you can select a schedule under **When is this rule active?** from the Rules Editor's *General* tab.

4.5 Whom Should it Apply to?

Do you need the rule for everyone? Certain users, groups or departments? How about setting up a terminal server to monitor all your vendors or external partners? Do you need to exclude anyone from the rule's enforcement?

You can choose all these from the *User* tab on the Rules Editor. You can also select users on a policy basis by turning on the **INHERIT POLICY SETTINGS**.

4.6 What Makes the Data Sensitive?

If you are trying to detect Content, can you describe how the data looks? Does it have a clear structure such as a credit card number? Or, do you need to detect information that are unstructured or dynamic in nature?

Use the **Content** tab on the *Rules Editor* to define your content. You can choose from a *Predefined Classified Data* or create your own custom data types by selection other options from the list.

4.7 What Scenarios Violate the Rule?

Now, you have to think about scenarios that will trigger the rule. You might need multiple conditions and logics to detect the rule violation. Remember, there are also multiple ways of achieving the same result.

For example, if you wanted to prevent uploading of files to a personal Cloud drive, you could use a condition to detect file operation 'upload'. And use a second condition, 'upload URL' and specify website addresses such as 'google.drive.com, dropbox.com' etc. Or, you could just select file operations for 'write' and select the 'Cloud providers' from the built-in list.

Use the individual **Categories** (i.e. Website, Application etc.) tab on the *Rules Editor* to define the conditions for the activity or content.

4.8 What Action(s) Do You Want to Take?

What should the system do when a rule is broken? Do you want it to notify you immediately? Or, do you want it to take some preventive actions too? For example, block the action? Or do you need to take a sequence of actions? For example, block the action but also record the incident? Or, take different action depending on how often they broke the rule? Assign a risk level to the action?

Use the **Actions** tab on the *Rules Editor* to define the action(s). Use the **Advanced Mode** to assign multilevel thresholds and risks.

5 Understanding Common Rule Elements

5.1 Rule Name and Description

Create a New Rule or Load a Template

NAME THIS RULE

Email with attachments

DESCRIPTION (OPTIONAL)

Warn user when sending emails w/ attachment to non-business address

Each rule lets you specify a name and optionally, a description for the rule.

5.2 Tags

MARK THIS POLICY WITH TAGS TO IDENTIFY ITS PURPOSE

email x etiquette x

?

Tags are keywords you can assign to a rule to easily identify it. They are useful in searching for the rule and can also be used as filters (i.e. on the Risk or Alerts report).

5.3 Schedule

When is this rule active?

Time that this rule is active


— +

By default, the rule stays active for 24 hours. However, you can adjust it to match your employee work schedule. For example, you can have the rule active during work hours but disable it during the employee lunch breaks. To change when the rule is active, drag the two **Circles**  to adjust the time. You can click the **Plus**  and **Minus**  buttons to add/remove additional time slots.

 Note: Agent Schedule rules and Anomaly rules do not have this rule schedule.

5.4 Rule Conditions

You use the **CONDITION** fields in a rule to specify what values to compare the rule parameters with. To specify a rule condition, start typing in the relevant CONDITION field, then select an option from the pop-up to tell Teramind what type of value it is.

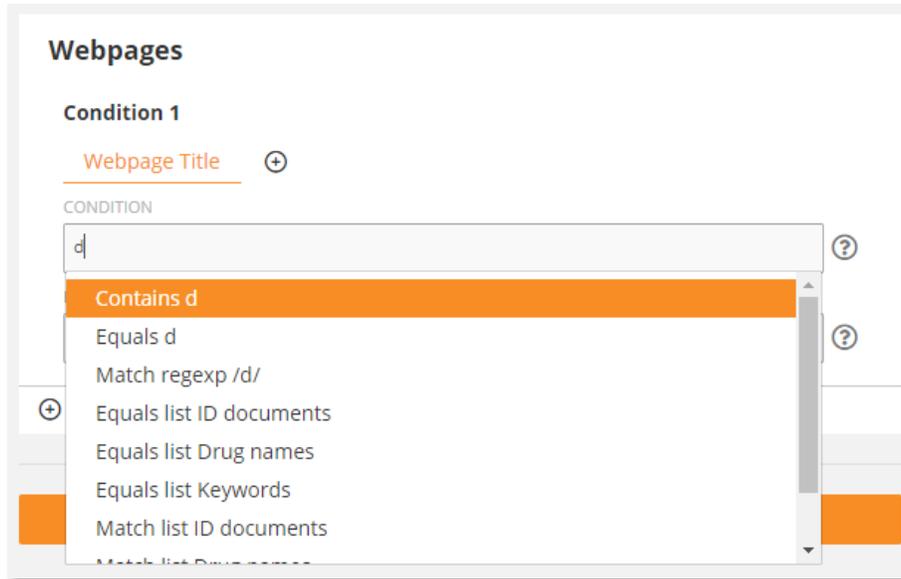

There are many ways you can use the conditions. For example:

Contains/Equals:

Use the *Contains* or *Equals* conditions for a partial or exact text match. For example, to block certain applications from running, you can type them in the CONDITION field and choose one of these conditions. Note that, these conditions aren't case sensitive.

Match List:

You can create a Shared List containing items of text, Regular Expressions or network addresses. For example, you can create a list of websites and use the *Match list* condition to block multiple applications without creating separate rule for each. Check out the [Shared List](#) section on the Teramind User Guide to learn more about Shared Lists.

Match RegExp:

For complex matches, such as Credit Card Numbers, Social Security Numbers etc., you can use the *Match RegExp* option. Teramind supports the standard Regular Expression library.




Note: You can use multiple values in a CONDITION field by clicking on a blank space in the field.

5.5 Rule Logic

Rule logic binds two or more Conditions or Content Definitions together. So, they can be applied to both the rule Conditions and the Content Definitions.

5.5.1 Condition Logic

Rule conditions can either have a 'OR' logic or an 'AND' logic.

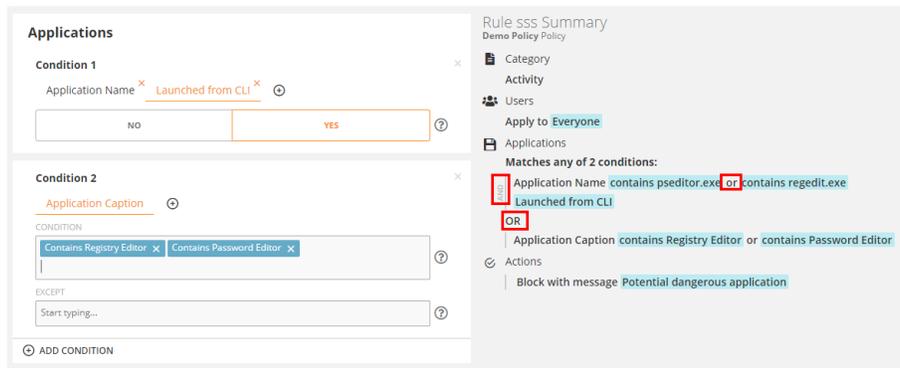


- Each value in a rule condition is considered as an 'OR' logic. In the above example, the rule will trigger if the 'Application Name' matches with 'regedit.exe' or 'pseditor.exe'.
- Each condition parameter is considered as an 'AND' logic. In the above example, the rule will trigger if the 'Application Name' and the 'Launch from CLI' parameters meets the condition.
- If you have multiple condition blocks, each new condition is considered as an 'OR' logic. In the above example, if either the Condition 1 or Condition 2 meets the criterion, the rule will be triggered.

You can see how the rule condition logics relate to each other on the Rule's **Summary** panel.

5.5.2 Content Logic

When creating a Content Sharing rule and you have multiple content definitions, you can use logics to bind the definitions together. You can do so under the *Advanced: Setup Logics* section of the **Content** tab. Click on the **logic** between two conditions, a pop-up menu will appear where you can select a logic out of four options.

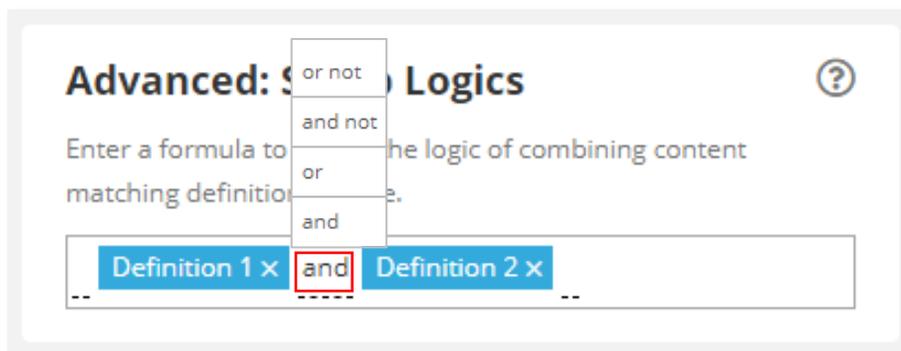

You can see how the content definition logics relate to each other on the Rule's **Summary** panel.



The table below explains each type of logic and how they are evaluated:

Logic	Evaluates true if:	Example
AND	BOTH of the definitions are met.	In the above example, we are using the <i>tags</i> field from the <i>File Properties</i> in Definition 1 and the <i>title</i> field in Definition 2. The logic will return true if file tags equals the text 'CONFIDENTIAL' <u>and</u> the title contains 'PRIVATE'. So, basically, it will process the files that are both confidential and private.
OR	EITHER of the definitions is met.	Using the above example, the logic will return true if file tags equals the text 'CONFIDENTIAL' <u>or</u> the title contains the text 'PRIVATE'. So, basically, it will process the files that are either confidential or private.
AND NOT	the first definition is met AND the second definition is NOT met.	Using the above example, the logic will return true if file tags equals the text 'CONFIDENTIAL' <u>and</u> the title does <u>not</u> contain the text 'PRIVATE'. So, basically, it will process the files that are confidential and not private.
OR NOT	the first definition is met OR the second definition is NOT met.	Using the above example, the logic will return true if file tags equals the text 'CONFIDENTIAL' <u>or</u> the title does <u>not</u> contain the text 'PRIVATE'. So, basically, it will process all files except the private ones.

5.6 Risk Level

On Teramind, you can assign risk levels to the rules. While optional, assigning risk levels has some advantages. It will let you analyse risk on the [Risk Report](#), view risk trend and identify high risk users and rules.

There are two places you can assign risks.


5.6.1 Setting the Risk Levels in a Regular Rule

The screenshot displays the 'Actions' tab of the Teramind Rule Editor. The main panel is titled 'Select how the system should react to violations'. It includes a 'Chose time period for thresholds' section with a dropdown set to 'Daily'. Below is a 'Configure action threshold' section with a slider and an 'ADD THRESHOLD' button. Two 'Define action' blocks are visible. 'Define action 1' has a frequency of '> 5' and a risk level of 'Moderate'. 'Define action 2' has a frequency of '> 10' and a risk level of 'High'. The right sidebar shows the rule's conditions: 'Matches any of 2 conditions: Webpage Url contains facebook.com or contains instagram.com or contains twitter.com or contains youtube.com or contains pinterest or contains tumblr excludes contains facebook.com/business or contains youtube.com/channel/UCSkRq9qTqFJyJQdovbD-Lg/ OR Webpage Title equals list Shopping Sites excludes contains staples.com'. The 'Actions' list on the right includes 'Do nothing'.

You assign risk level to a regular rule from the **Advanced Mode** of the *Rule Editor's Actions* tab. You can choose from: No Risk, Low, Moderate, High and Critical.

You can assign risk levels to each action block separately (you create action blocks by clicking the **ADD THRESHOLD** button).

5.6.2 Setting the Risk Level in an Anomaly Rule

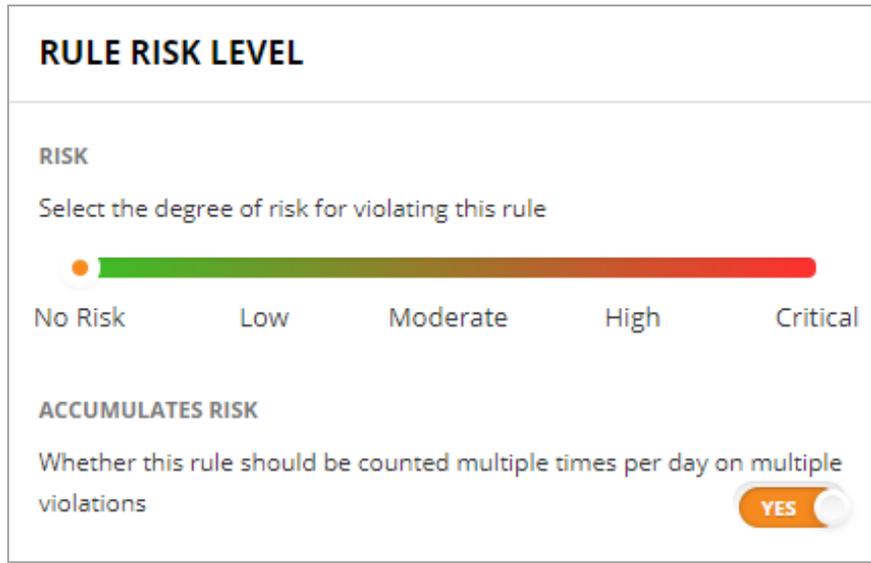

RULE RISK LEVEL

RISK
Select the degree of risk for violating this rule

●

No Risk Low Moderate High Critical


ACCUMULATES RISK
Whether this rule should be counted multiple times per day on multiple violations

YES

You assign risk level to an Anomaly rule Under its RULE RISK LEVEL section. You can choose from: No Risk, Low, Moderate, High and Critical. You can also turn on its ACCUMULATES RISK option on. If turned on, the risk associated with the rule will be counted multiple times for multiple violations. Otherwise it will be counted once for all violations. Unlike the regular rules which support multilevel risk assignments, you can assign only one risk level per anomaly rule.

5.7 Rule Summary

The right-most panel of the Rules Editor shows a summary of the rule in easy to follow language. You can see the values used in different tabs; what conditions are used and the logical connection among them; rule actions etc.

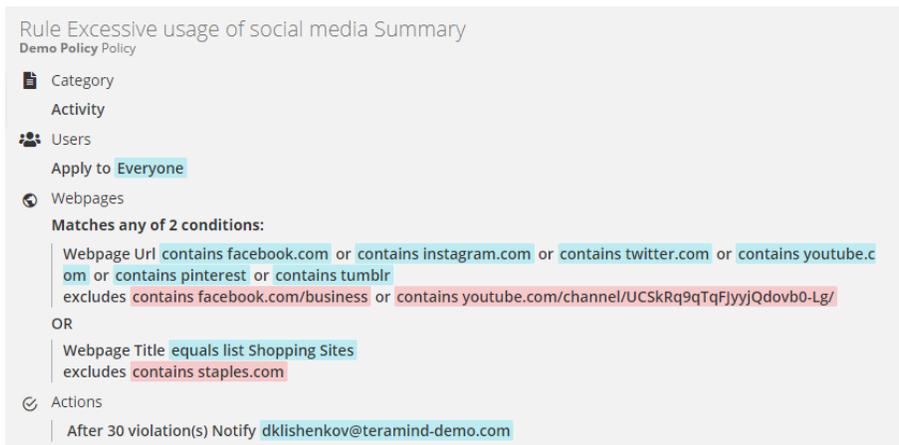

Rule Excessive usage of social media Summary
Demo Policy Policy

Category
Activity

Users
Apply to **Everyone**

Webpages
Matches any of 2 conditions:
Webpage Url contains facebook.com or contains instagram.com or contains twitter.com or contains youtube.com or contains pinterest or contains tumblr
excludes contains facebook.com/business or contains youtube.com/channel/UCSkRq9qTqFjyyjQdovb0-Lg/
OR
Webpage Title equals list Shopping Sites
excludes contains staples.com

Actions
After 30 violation(s) Notify dklishenkov@teramind-demo.com



Note: Anomaly Rules Editor does not have a Summary panel.


6 Creating Regular Rules

The Rules Editor is an intuitive, visual editor where you can create sophisticated threat detection, productivity optimization or data loss prevention rules easily without going through multiple screens or coding.

To access the Rules Editor, create a new rule or edit an existing rule from the **Behavior > Policies** menu.

6.1 Setting Up the Rule Basics

You specify the basic settings for the rule on the Rules Editor's **General** tab.

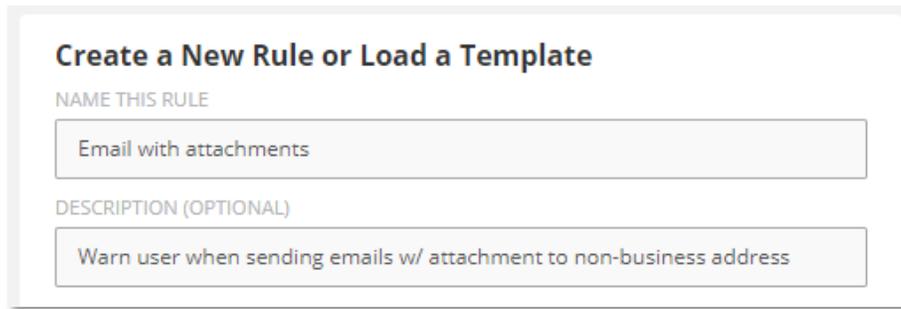

Create a New Rule or Load a Template

NAME THIS RULE

Email with attachments

DESCRIPTION (OPTIONAL)

Warn user when sending emails w/ attachment to non-business address

On the top fields, specify a Name and optionally, a Description for the rule.



MARK THIS POLICY WITH TAGS TO IDENTIFY ITS PURPOSE

email x etiquette x

You can also specify the rule's Tags on this tab. Tags are keywords you can assign to a rule to easily identify it. They are useful in searching for the rule and can also be used as filters (i.e. on the Risk or Alerts report).

6.2 Selecting Rule Categories and Types

You can select the *Rule Category* and *Types of Activities* (for Activity-based rules) or the *Types of Content* (for Content Sharing rules) from the Rules Editor's **General** tab.

There are three types of rule categories you can choose from: Agent Schedule, Activity and Content Sharing. Each category further supports different activities or content types. The table below shows which categories supports which activity/content types and their use cases:

	Agent Schedule	Activity	Content Sharing
Use Cases	Useful for detecting discrepancies in employee schedules or workflow. For example, receive notification when an employee is late. Or, block remote login during odd-hours or from unrecognized IPs.	Useful for detecting and controlling user activities for a range of monitored objects. For example, restricting app/website usage. Or, preventing file transfer operations (copy, upload, download etc.) on a folder/app/URL.	Useful for protecting sensitive data. For example, block and email that contains personally identifiable information. Or, preventing file transfer operations when certain content is detected in the file.
Type of Activity/Content	<ul style="list-style-type: none"> Schedule 	<ul style="list-style-type: none"> Webpages Applications OCR Keystrokes Files Emails IM Browser Printing Networking 	<ul style="list-style-type: none"> Content Clipboard Files Emails IM

6.3 Defining Users

You specify the users for the rules on the Rules Editor's **User** tab.

Here you specify which users, groups, departments or computers the rule will apply to. If you select a computer, the rule will apply to all the users on that computer.

INHERIT POLICY SETTINGS NO

APPLY RULE TO

Everyone X

EXCLUDE FROM RULE

Third-party Vendors X


By default, the rule will inherit the user settings from the policy the rule is a part of. However, you can turn off the INHERIT POLICY SETTINGS to select users manually.

You can specify who the rule will apply to and optionally, exclude anyone you don't want to be included using the EXCLUDE FROM RULE field.

Check out the Teramind User Guide to learn how to add users, computers, groups and departments.

6.4 Defining Detection Criteria

After you have decided what type of rule you need and which users the rule will apply to, the next part is defining the detection criteria and scope. You will specify what, how or when the rule will be activated. You do this by selecting different parts of the selected Activity Type or Content Type. For example, the *URL* of the Webpage activity or the *Application Name* of the Clipboard content etc. You can then specify Condition Logics against the part(s) and the values you want to detect. Here's how a detection criterion may look like:

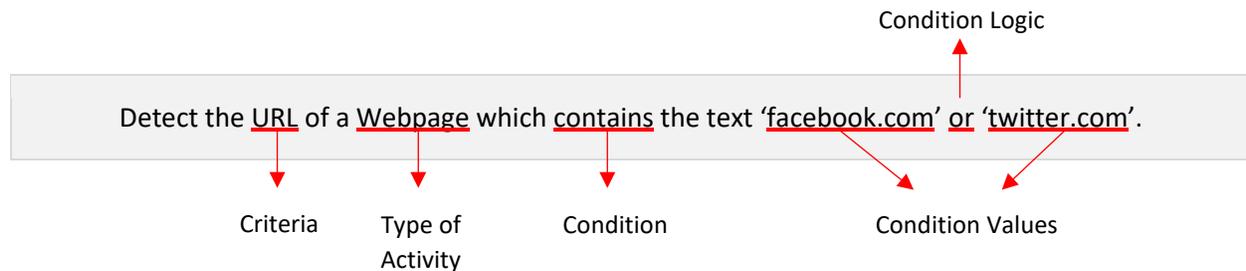

In the next few sections, we will walk you through all the available options for setting detection criteria for each rule type.

6.4.1 Agent Schedule Rules: What Schedule Violations Can You Detect?

You can specify the detection criteria for the Agent Schedule-based rules from the **Schedule** tab. Agent Schedule-based rules are the easiest to define as most of it deals with only one detection criterion, schedule/time.



Agent Schedule-based rules use the employee schedules to determine their detection criteria. Check out the [Configure > Schedules](#) section of the Teramind User Guide to learn how to configure schedules for employees.

6.4.1.1.1 Rule Examples

- Get notified when a user attempts to login during abnormal hours or on off days.
- Warns user or automatically locks out their computer if they are idling for too long.
- Notify supervisor automatically when an employee is absent or late.

- Notify HR and/or payroll if employee’s work time or scheduled work hours change.
- Create a list or range of restricted IPs and disallow login from those IPs.

6.4.1.1.2 Rule Criteria

The table below explains what criteria or schedule violation incidents the Agent Schedules supports and what conditions you can use with them.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Daily Work Time ?

IS LESS THAN IS GREATER THAN ?

SPECIFY VALUE

> 8 hrs

Daily Work Time

Used to detect if there are any discrepancies in the employee’s daily work time. You can detect if their work hour is less than or more than specified hour(s).

Select either IS LESS THAN or IS GREATER THAN and enter an hour value in the SPECIFY VALUE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Scheduled Work Time ?

IS SHORT BY IS OVER BY ?

DEFINE THE TIME RANGE

< 0 min

Scheduled Work Time

Used to detect if the employee is working longer or shorted than scheduled.

Select either IS SHORT BY or IS OVER BY and enter a minute value in the SPECIFY VALUE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Starts early ?

DEFINE THE TIME RANGE

> 30 min

Starts Early

Detects if the employee started their work earlier than scheduled, by specified minutes.

Enter a minute value in the DEFINE THE TIME RANGE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Ends early ▼ ?

DEFINE THE TIME RANGE

> 30 min

Ends Early

Detects if the employee ends their work earlier than scheduled, by specified minutes.

Enter a minute value in the DEFINE THE TIME RANGE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Ends late ▼ ?

DEFINE THE TIME RANGE

> 0 min

Ends Late

Detects if the employee ends their work later than scheduled, by specified minutes.

Enter a minute value in the DEFINE THE TIME RANGE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Arrives late ▼ ?

DEFINE THE TIME RANGE

> 0 min

Arrives Late

Detects if the employee starts their work later than scheduled, by specified minutes. Note that, unlike the 'Is Late' condition, this will trigger the rule after the employee has logged in.

Enter a minute value in the DEFINE THE TIME RANGE field.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Is absent ▼ ?

Is Absent

Detects if the employee is absent.

No other value is required.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Is late ▼ ?

DEFINE THE TIME RANGE

> 0 min

Is Late

Detects if the employee is late in logging in to their computer according to their scheduled start time. Note that, unlike the 'Arrives Late' condition, this will trigger the rule before the employee has logged in.

Enter a minute value in the DEFINE THE TIME RANGE field.

Definition 1
SELECT TYPE OF SCHEDULE VIOLATION
Works on Day-off

This screenshot shows a configuration panel for a rule definition. It has a title 'Definition 1' and a dropdown menu labeled 'SELECT TYPE OF SCHEDULE VIOLATION' with the option 'Works on Day-off' selected. A help icon is visible to the right of the dropdown.

Works on Day-Off

Detects if the employee is working on their day off.

No other value is required.

Definition 1
SELECT TYPE OF SCHEDULE VIOLATION
Login

SETUP OFF-HOURS
[Slider with - and + buttons]

RESTRICTED IPS
Matches list member Blacklisted IPs

Apply on screen unlock

EXCLUDED DAYS
Sun Mon Tue Wed Thu Fri Sat

This screenshot shows a more complex configuration panel for a rule definition. It has a title 'Definition 1' and a dropdown menu labeled 'SELECT TYPE OF SCHEDULE VIOLATION' with the option 'Login' selected. Below this is a 'SETUP OFF-HOURS' section with a slider and '+' and '-' buttons. The next section is 'RESTRICTED IPS' with a text box containing 'Matches list member Blacklisted IPs'. There is a checkbox for 'Apply on screen unlock'. The final section is 'EXCLUDED DAYS' with a row of buttons for the days of the week: Sun, Mon, Tue, Wed, Thu, Fri, and Sat. The 'Sun' and 'Sat' buttons are highlighted in orange.

Login

Detects if the employee logs in during off hours and optionally also detects if they are trying to login from a restricted IP.

Set the off-hour range on the SETUP THE OFF-HOURS slider. You can click the + / - buttons to add/remove hours. Drag the slider **Circles** to adjust the hours.

You can restrict IPs from where the login is not permitted in the RESTRICTED IPS field. You can enter any text in the IPv4 format, i.e.: 101.10.2.1/32 and choose a 'Equals' or 'Not Equals' conditions. Or, you can select a Shared List (Network-based) and specify a 'Match List' or 'Does Not Match' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

If you check the 'Apply on screen unlock' box, then the login event will be triggered when the user unlocks their screen.

Click on the days under the EXCLUDE DAYS section to include/exclude days in the detection criterion.

Definition 1

SELECT TYPE OF SCHEDULE VIOLATION

Idle ?

DEFINE THE TIME RANGE

> 0

Idle

Detects if the employee is idling (no keyboard or mouse activity) for more than specified minutes.

Enter a minute value in the DEFINE THE TIME RANGE field.

6.4.2 Activity Rules: What Activities Can You Detect?

You can specify the detection criteria for the Activity-based rules from their respective activity tab(s). For example, if you selected Webpages and Emails from the *Type of Activity* section (in the **General** tab), you will have two tabs called 'Webpages' and 'Emails' where you can add the rule conditions and values.

6.4.2.1 Webpages

Webpages activity allows you to detect web browsing activities through URL, title and query arguments and browsing-related timing (i.e. idle/active).

6.4.2.1.1 Rule Examples

- Warn users when spending excessive time on social media or entertainment sites such as YouTube.
- Restrict access to non-whitelisted/unauthorized websites but allow managers to override if needed.
- Find out potential turnover by checking if employees are searching on jobsites. Get notified if the time spent on such sites exceeds a threshold.

6.4.2.1.2 Rule Criteria

The table below shows what criteria the Webpages activity supports and what conditions you can use with them.

Condition 1


Any ?

Capture any actions

Any

Lets you detect if a webpage is visited.

i If you use this option without any other criteria, Teramind will trigger the rule anytime a webpage is visited.

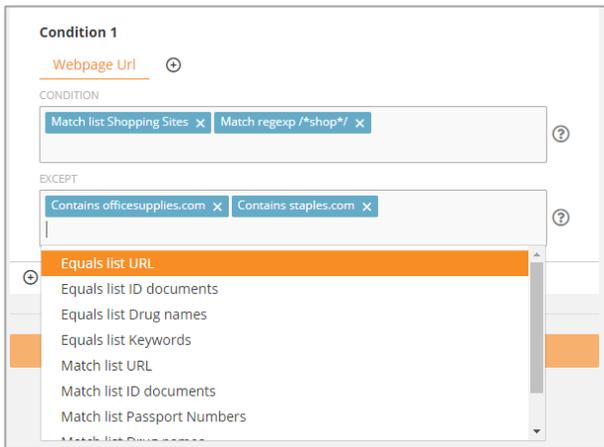


Webpage URL

Used to detect an URL (webpage address) or part of an URL.


You can enter some text in the CONDITION field and choose from 'Contains', 'Equals' or 'Match RegExp'. Or, you can select a Shared List and specify a 'Match List' or 'Equals' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any URLs in the EXCEPT field.

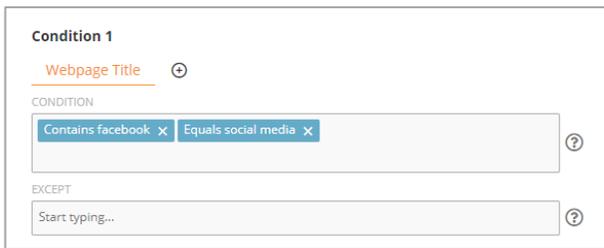

Webpage Title

Similar to the *Webpage URL* criterion, just use the webpage title instead.

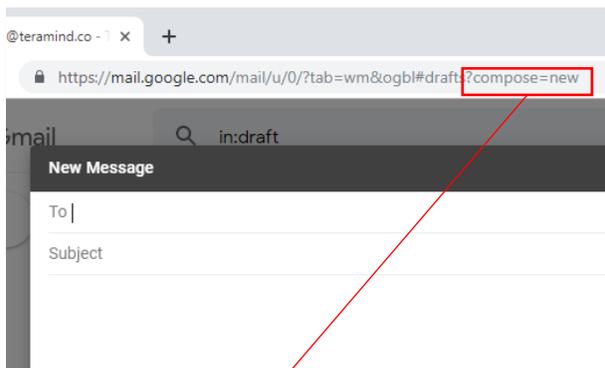


Query Argument Name

A query argument name is the portion of a URL where data is passed to a website. It usually starts with a '?' or '&'. For example: `www.contacts.com/saved?company=teramind`. Here, *company* is the query argument name.



Using this criterion, you can create interesting detection rules. For example, by checking for the 'compose' argument in the Gmail website, you can detect if the user is composing an email. Combining this with the *Webpage URL* or *Webpage Title* criterion, you can detect more granular activities. For example, using the text 'new' in the *Webpage URL* and specifying 'compose' in the *Query Argument Name*, you can tell if a user is composing a new mail or editing an existing draft.

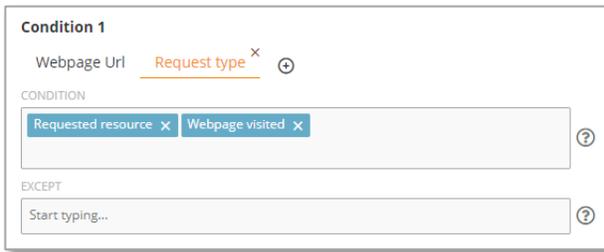

Request Type*

This criterion allows you to further finetune when the rule action will trigger when the user visits an URL specified in the *Webpage URL* condition. It has two options:

Webpage Visited: detects visited pages, downloaded files, etc. When you select this option, the rule will trigger only when the user visits the webpage specified in the *Webpage URL* condition and not any automated/background browser request. Previously, there was no way to distinguish user-initiated queries from secondary resource queries, therefore triggering false positives.

Consider this scenario:

1. You have a rule that blocks a *Webpage URL*, `twitter.com`.
2. User visits some unrelated website, such as `news.com`.
3. The user is blocked to visit `news.com` because that website made a query to get some ads from `twitter.com`.

If you enable the *Request Type > Webpage Visited* option, the user can now visit `news.com` without the rule getting triggered.

Requested Resource: detects browser requests for static content, e.g., JS, CSS, images, etc., pages opened through an iframe, as well as API requests.

Consider this scenario:

4. You have a rule that blocks a *Webpage URL*, `facebook.com`.
5. User visits some unrelated website, such as `news.com` which has some Facebook ads.

If you enable the *Request Type > Requested Resource* option, the user will be allowed to visit `news.com` freely but the ads from Facebook will not load (404 error).

i The *Request Type* criterion is only shown when you have already selected a *Website URL* criterion.

* This feature may not work properly on older browsers. You need at least Chrome version 79, Edge version 79, Firefox version 89, Opera version 66, etc.

Condition 1
Webpage Url Time Active (min) ^x ⊕
CONDITION
> 60min. ⊕

Time Active

Used to detect how long the user has been active on the website.

You can enter a minute value in the CONDITION field and use '=', '>', '>=' logics.

i The *Time Active* criterion is only shown when you have already selected a *Website Title* or a *Website URL* criterion.

Condition 1
Webpage Url Time Idle (min) ^x ⊕
CONDITION
> 20min. ⊕

Time Idle

Similar to the *Time Active* criterion but shows how long the user has been idle/inactive on the site.

You can enter a minute value in the CONDITION field and use the '>' logic.

i The *Time Idle* criterion is only shown when you have already selected a *Website Title* or a *Website URL* criterion.

Condition 1
Webpage Url Total Time Active (min) ^x ⊕
CONDITION
> 120 ⊕

Total Time Active

Similar to the *Time Active* criterion but shows the total time active (a combination of all the active times during an entire session).

You can enter a minute value in the CONDITION field and use '=', '>', '>=' logics.

i The *Total Time Active* criterion is only shown when you have already selected a *Website Title* or a *Website URL* criterion.



Total Time Idle

You can enter a minute value in the **CONDITION** field and use '=', '>', '>=' logics.

i The *Total Time Active* criterion is only shown when you have already selected a *Website Title* or a *Website URL* criterion.

6.4.2.2 Applications

Applications activity allows you to detect the launch of any application including the ones run from the command line interface or through the Windows Run command.

6.4.2.2.1 Rule Examples

- Detect and block when a dangerous application (i.e. Windows Registry Editor) or an unauthorized application is launched.
- Warn users when spending time on unproductive applications such as games, music/video player etc.
- Detect when anonymous browsers, such as, 'Tor' is used.
- Detect when screen sharing applications, snipping tools or peer-to-peer file sharing/torrent software are used.

6.4.2.2.2 Rule Criteria


The table below explains what criteria the Applications activity supports and what conditions you can use with them.



Any

Lets you detect if an application is launched.

i If you use this option without any other criteria, Teramind will trigger the rule anytime, any application is launched.

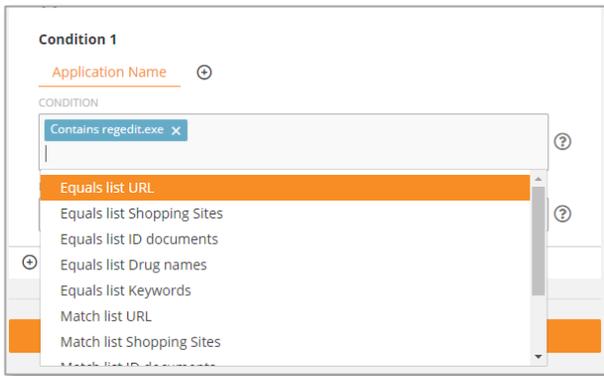

Application Name

Used to detect the name or part of the name of an application. For example: 'regedit.exe'.

You can enter any text in the CONDITION field and choose from 'Contains', 'Equals' or 'Match RegExp'. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any applications you do not want to track in the EXCEPT field.



Application Caption


Similar to the *Application Name* criterion, just use the application caption instead. For example: 'Registry Editor'.



Launched from CLI

Detects if an application is launched from the CLI (Command Line Interface).

Select YES or NO.

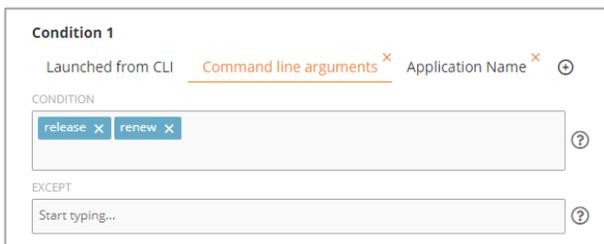

Command Line Arguments

Command line arguments are additional parameters, options or values passed to an application when launching it from the CLI. They usually start with a '/', '-' or a space after the application name. For example: `C:\ipconfig /renew`. Here, *renew* is an argument.


Using this criterion, you can, for example, disable certain functions of an application. For



example, in the second screenshot on the left, we blocked the launch of the *ipconfig* application when the *release* or *renew* arguments are used. Otherwise, it will run as usual.

You can only use text value with the 'Contains', 'RegExp' or exact text match conditions for the CONDITION field.

i The *Command Line Arguments* criterion is only shown when you have already selected YES for the *Launched from CLI* criterion.

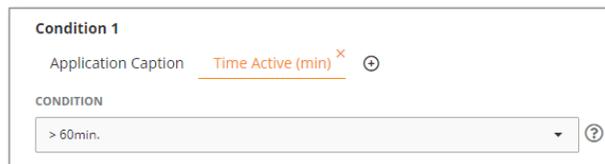

Time Active

Used to detect how long the user has been active on an application.

You can enter a minute value in the CONDITION field and use '=', '>', '>=' logics.

i The *Time Active* criterion is only shown when you have already selected an *Application Name* or an *Application Caption* criterion.



Time Idle

Similar to the *Time Active* criterion but shows how long the user has been idle/inactive on an application.

You can enter a minute value in the CONDITION field and use the '>' logic.

i The *Time Idle* criterion is only shown when you have already selected an *Application Name* or an *Application Caption* criterion.

Condition 1

Application Name Total Time Active (min) ^x ⊕

CONDITION

= 180 ?

Total Time Active

Similar to the *Time Active* criterion but shows the total time active (a combination of all the active times during an entire session).

You can enter a minute value in the CONDITION field and use '=', '>', '>=' logics.

i The *Total Time Active* criterion is only shown when you have already selected an *Application Name* or an *Application Caption* criterion.

Condition 1

Application Name Total Time Idle (min) ^x ⊕

CONDITION

= 60 ?

Total Time Idle

You can enter a minute value in the CONDITION field and use '=', '>', '>=' logics.

i The *Total Time Active* criterion is only shown when you have already selected an *Application Name* or an *Application Caption* criterion.

6.4.2.3 OCR

The OCR detects on-screen text in real-time, even inside images or videos. It works with multi-screen setups, virtual desktops and terminal servers. By default, OCR detects English text. But you can also use Hebrew, Dutch, Russian, Spanish or Turkish language. Check out the [Editing Screen Settings](#) section on the Teramind User Guide to learn how to change the default OCR language.

6.4.2.3.1 Rule Examples

- Generate an alert when a user sees a full credit card number on the screen violating the PCI DSS compliance requirements.
- Get notified when your employees visit sites that contain illegal or questionable content, such as: hacking, pornographic or piracy related content.
- Detect if an unauthorized user is viewing a document that contains sensitive words.
- Prevent steganographic data exfiltration by detecting information hidden inside images or videos.

6.4.2.3.2 Rule Criteria

The table below shows what criteria the OCR supports and what conditions you can use with them.




On-Screen Text

Used to specify the text to detect on-screen.

If you type anything in the field, you can choose from 'Contains', 'Match regexp', 'Match list' as conditions. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' condition without typing any text. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can use the EXCEPT field to do detect any text except for the ones defined in this field.

i Be careful while using the EXCEPT field as it will detect all text on the screen except the ones you exclude, triggering the rule every time!

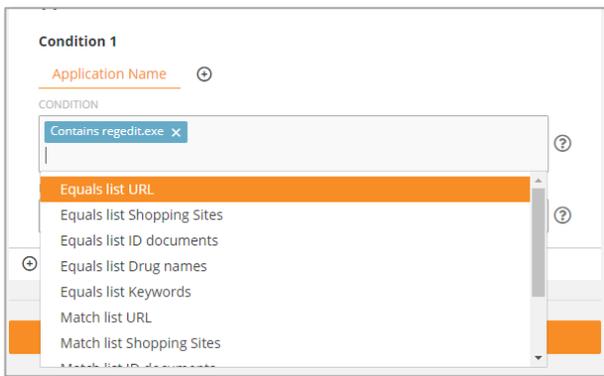

Application Name

Used to specify the applications in which the OCR content will be detect.

You can choose from 'Contains', 'Equals' or 'Equals List' with any text as conditions. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Equals List' or 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any applications you do not want to track in the EXCEPT field.

i The *Application Name* criterion is only shown when you have already specified an *On-Screen Text* condition.

6.4.2.4 Keystrokes

Keystrokes activity is used to detect keystrokes entered by the users in applications or websites. In addition to regular keys, you can also detect the clipboard operations (copy/paste commands), use of special keys such as the Print Screen or multiple simultaneous keypress or combo keys such as CTRL+C.

6.4.2.4.1 Rule Examples

- Detect if someone is taking screenshots with the likely intention of stealing information.
- Detect if an employee is using unprofessional language with a customer on live chat.
- A user repeating easy to guess passwords, hence, creating a security risk.
- Disable keyboard macros or select combo keys in certain applications or for some users.

6.4.2.4.2 Rule Criteria

The table below shows what criteria the Keystrokes activity supports and what conditions you can use with them.

Condition 1

Text Typed

CONDITION

Contains <PrtSc> Contains <Shift+PrtSc>

EXCEPT

Start typing...

Text Typed

Used to detect continuous text without any word break. For example, if text typed = "password", the rule will be triggered when the last letter 'd' is typed.

You can enter any text in the CONDITION field and choose the 'Contains' or 'Match RegExp' option. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Equals List' or 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text you do not want to detect in the EXCEPT field.

Condition 1

Word typed

CONDITION

Contains password

EXCEPT

Start typing...

Word Typed

Used to detect word typed with breaks. For example, if word typed = "password" the rule will be triggered when you finish typing the word and then type separation key, such as: <Space> or '!' or '.' (dot).

You can enter any text in the CONDITION field and choose the 'Contains' option. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Equals List' or 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any word you do not want to detect in the EXCEPT field.



Special Key Typed

You can detect special keys such as the function keys (i.e. F1), PrtScr or key combinations such as <Shift+P>. When you select the *Special Key Typed* criteria and click on the CONDITION field, Teramind will pop-up a virtual keyboard where you can select the special keys.



Application Name


Specifies which applications will be tracked.

You can enter any text in the CONDITION field and choose from 'Contains', 'Equals' or 'Match RegExp'. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any applications you do not want to track in the EXCEPT field.

i The *Application Name* criterion is only shown when you have already selected a *Text Typed* or *Word Typed* criterion. Also, if you use this criterion, you cannot use the *Webpage URL* criterion in the same condition block. However, you can use both criteria in separate

condition blocks (i.e. *Condition 1* and *Condition 2*).

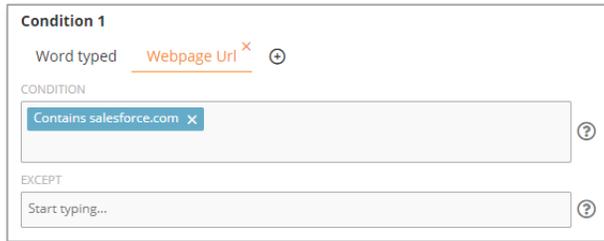

Webpage URL

Specifies which websites will be tracked. This is same as the *Webpage URL* criterion under the [Webpages](#) activity.

i The *Webpage URL* criterion is only shown when you have already selected a *Text Typed* or *Word Typed* criterion. Also, if you use this criterion, you cannot use the *Application Name* criterion in the same condition block. However, you can use both criteria in separate condition blocks (i.e. *Condition 1* and *Condition 2*).

6.4.2.5 Files

Files activity lets you detect file operations such as access, read, write, upload, download, create folder, rename folder, etc. Each operation allows you to further specify additional detection criteria. For example, the *Download* operation lets you detect the program, file name, URL and file size.



Note that Teramind cannot track the copy operation for a file from one network server to the same network server (e.g. source and destination is the same). For example, copying of a file from `\\103.247.55.101\source_folder` to `\\103.247.55.101\destination_folder` cannot be tracked. Copy to and from same local drives is detected as usual.

Also copying of an empty file cannot be tracked since it will be impossible for the system to distinguish between the file *create* and *copy* operations due to the zero size of the file.

Note that not all criteria are available for all file operations. Teramind will automatically show or hide the criteria based on which file operation you select. For example, if you select the *Insert* or the *Eject* operation, you will only see the *Program* and *Drive* criterion.



Select a file operation by clicking the CONDITION filed.

Click the **+** button to add a criterion to the operation.


i If you choose the 'Any' file operation without any other criteria, Teramind will trigger the rule for any file operations.

6.4.2.5.1 Rule Examples

- Detect/block access to sensitive folders.
- Turn a folder or drive write proof, preventing any changes to the files in that folder.
- Get notified when files are uploaded to Cloud sharing sites, such as, Drobox, Google Drive etc.
- Block files from being copied to/from removable media, such as, USB drives.
- Prevent changes of program settings or tampering of configuration files.
- Block certain file transfer protocols, such as, FTP.
- Restrict the transfer of large files.

6.4.2.5.2 Rule Criteria

The table below describes the criteria you can use for the Files activity, and which file operations are supported for each criterion.

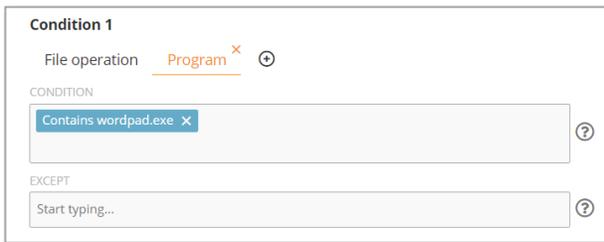


Program

Lets you specify in which program/app the file operation took place.

You can choose from 'Contains', 'Equals' or 'Match RegExp'.

Similarly, you can exclude any programs you do not want to track in the EXCEPT field.

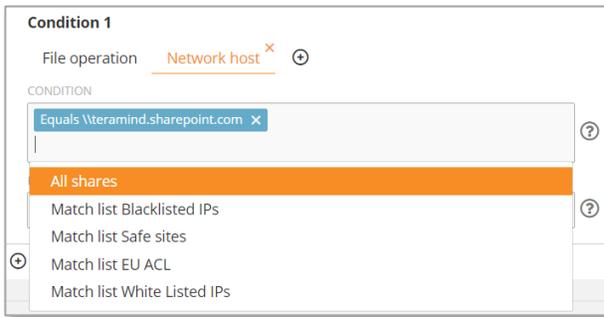


Network Host

Used for network-based file operations. It detects the host name of the file operation. For example: `http://sharepoint.com`, `ftp://filevault.net` etc.

You can choose from 'Contains', 'Equals', 'All Shares'. Or, you can select a Shared List (Network-based) and specify a 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any hosts you do not want to track in the EXCEPT field.

i This criterion is not supported in: Insert, Eject, Download and Upload operations.

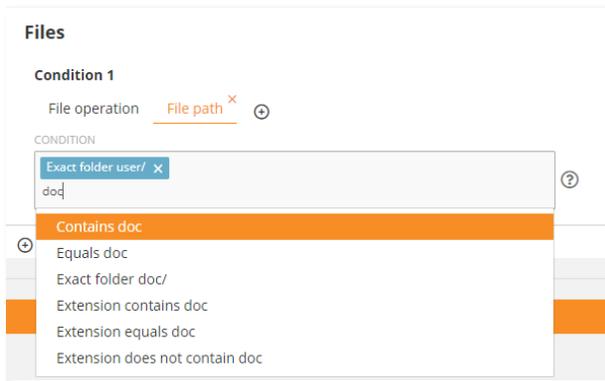


File Path

Used to detect a file path, folder or extension. For example: `document`, `c:\windows` etc. File extension are used to identify a file type and usually starts with a '.' (dot)'. For example: `.doc`, `.pdf` etc. Note: you do not need to specify the '.' when entering the extension.

You can choose from 'Contains', 'Equals', 'Exact Folder'. Or, you can check for file extensions using one of the 'Extension Contains', 'Extension Equals', 'Extension Does Not Contain' options.

Similarly, you can exclude any path(s) you do not want to track in the EXCEPT field.

i This criterion is not supported in: Insert, Eject, Download and Upload operations.

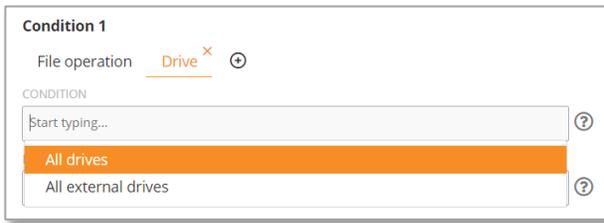


Drive

Detects the local, network or external drives.

You can choose either 'All Drives' or 'All External Drives'.

i This criterion is not supported in: Download and Upload operations.

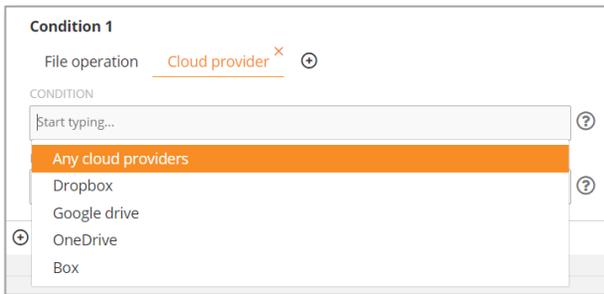


Cloud Provider

Used to detect the cloud provider.

You can choose from 'All Cloud Providers', 'Dropbox', 'Google Drive', 'OneDrive' or 'Box'.

Similarly, you can exclude any providers you do not want to track in the EXCEPT field.

i This criterion is not supported in: Insert, Eject, Download and Upload operations.

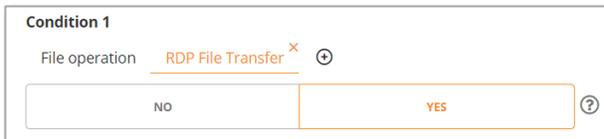


RDP File Transfer

Detects if the file copy operation is done over an RDP (Remote Desktop Protocol) session. This happens when you connect to a remote computer and copy files to/from it.

You can select either YES or NO.

i This criterion is only supported in the Copy operation

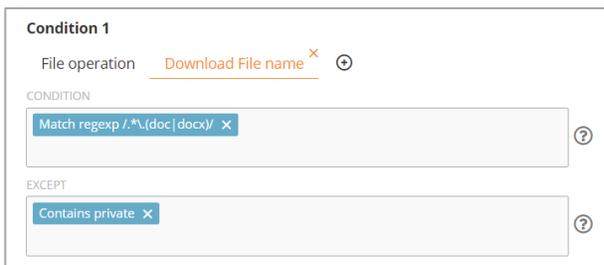

Download File Name

Lets you detect the download file name.

You can choose from 'Contains', 'Equals' or 'Match RegExp'.

Similarly, you can exclude any files you do not want to track in the EXCEPT field.

i This criterion is only supported in the Download operation.

The screenshot shows a configuration window for 'Condition 1'. Under 'File operation', 'Download URL' is selected. The 'CONDITION' field contains 'Contains https://piratefiles.net'. The 'EXCEPT' field is empty with the placeholder text 'Start typing...'. There are question mark icons next to both input fields.

Download URL

Similar to the *Download File Name* criterion but used to detect the download URL instead.

i This criterion is only supported in the Download operation.

The screenshot shows a configuration window for 'Condition 1'. Under 'File operation', 'Download File size (bytes)' is selected. The 'CONDITION' field contains '> 10000'. The 'EXCEPT' field contains '< 20000'. There are question mark icons next to both input fields.

Download File Size

Used to detect the size (in bytes) of the file being downloaded.

You can enter a byte value in the CONDITION field and use '=', '>', '<', '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

i This criterion is only supported in the Download operation.

The screenshot shows a configuration window for 'Condition 1'. Under 'File operation', 'Upload File name' is selected. The 'CONDITION' field contains 'Contains confidential' and 'Contains sensitive'. The 'EXCEPT' field is empty with the placeholder text 'Start typing...'. There are question mark icons next to both input fields.

Upload File Name

Similar to the *Download File Name* criterion but used for Upload operation instead.


i This criterion is only supported in the Upload operation.

The screenshot shows a configuration window for 'Condition 1'. Under 'File operation', 'Upload URL' is selected. The 'CONDITION' field is empty with the placeholder text 'Start typing...'. The 'EXCEPT' field contains 'Contains teramind.co'. There are question mark icons next to both input fields.

Upload URL

Similar to the *Download URL* criterion but used for the Upload operation instead.


i This criterion is only supported in the Upload operation.

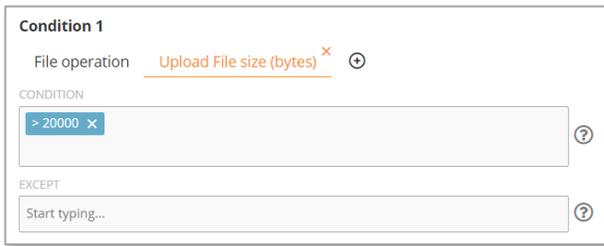

Upload File Size

Similar to the *Download File Size* criterion but used for the Upload operation instead.

i This criterion is only supported in the Upload operation.

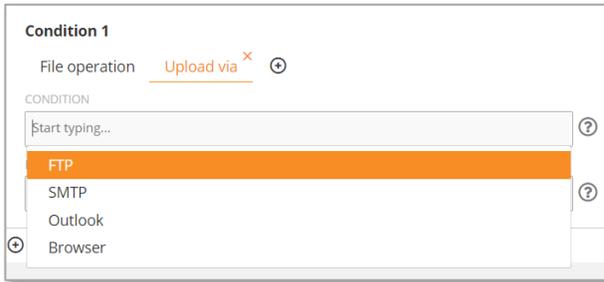

Upload Via

Lets you detect what kind of application or protocol is used for the upload operation.

You can choose from 'FTP', 'SMTP', 'Outlook' or 'Browser'.

Similarly, you can use the EXCEPT field to ignore any protocol/application you do not want to track.

i This criterion is only supported in the Upload operation.

6.4.2.6 Emails

Emails activity lets you detect outgoing and incoming emails including any email attachments.

6.4.2.6.1 Rule Examples

- Prevent attaching files from certain location(s) such as, a folder, a network path or a Cloud drive.
- Restrict sending of work emails from personal email accounts.
- Prevent sending of attachments to non-business addresses.
- Detect if a competitor is contacting your employees or vice versa.
- Get notified if a user is sending emails with large attachments.

6.4.2.6.2 Rule Criteria

The table below shows what criteria the Email activity supports and what conditions you can use with them.

Condition 1

Any ⊕

Capture any actions

Any

Lets you detect if an email is sent or received.

i If you use this option without any other criteria, Teramind will trigger the rule anytime an email is sent or received.

Condition 1

Mail Body ⊕

CONDITION

Match list Keywords × ?

EXCEPT

Start typing... ?

Mail Body

Used for detecting text inside the mail body.

You can choose from 'Contains' or 'RegExp' with any text. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.

Condition 1

Mail Subject ⊕

CONDITION

Contains important × Contains urgent × Contains official ×
Contains sensitive × Contains confidential × ?

EXCEPT

Start typing... ?

Mail Subject

Used for detecting text inside the mail subject.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can select a Shared List and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.

Condition 1

Mail CC ⊕

CONDITION

Contains legal × Contains Nathan × ?

EXCEPT

Contains teramind.co × ?

Mail CC

Detects the CC addresses in an email.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can select a Shared List and specify a 'Match List' or 'Equals List' condition. Check out the [Shared](#)

[List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.



Mail To

Similar to *Mail CC* criterion but used to detect the *Mail To* addresses instead.



Mail From


Similar to *Mail CC* and *Mail To* criterion but used to detect the *Mail From* addresses instead.



Mail Direction

Lets you detect if the mail is being sent or received.

Select either the INCOMING or OUTGOING option.

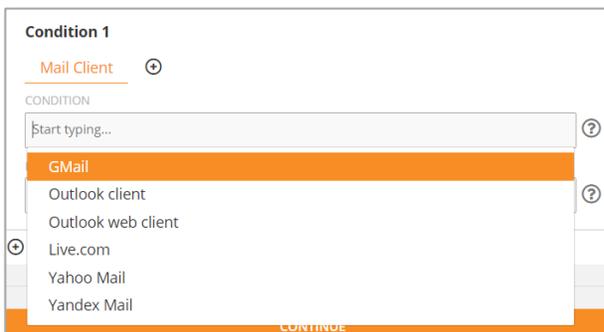

Mail Client

Used to specify the mail client you want to detect.

You can choose from 'Gmail', 'Outlook Client', 'Outlook Web Client', 'Live.com', 'Yahoo Mail', and 'Yandex Mail'. Teramind keeps adding support for new clients so you might see more clients than mentioned here.

Similarly, you can exclude any client(s) you do not want to track in the EXCEPT field.

The screenshot shows a rule configuration window titled 'Condition 1'. Under the 'Has attachments' criterion, there are two radio button options: 'NO' and 'YES'. The 'YES' option is selected and highlighted with an orange border. A help icon (?) is visible next to the 'YES' option.

Has Attachments

Used to detect if the mail has any attachment.

Select either the YES or NO option.

The screenshot shows a rule configuration window titled 'Condition 1'. The 'Has attachments' criterion is selected. Below it, the 'Attachment name' criterion is active. The 'CONDITION' field contains two entries: 'Extension contains doc' and 'Extension contains xls'. Each entry has a small 'x' icon to its right. A help icon (?) is visible at the bottom right of the condition field.

Attachment Name

Used to detect the names or extensions for the attached files. A file extension is used to identify a file type and usually starts with a '.' (dot). For example: *.doc*, *.pdf* etc. Note: you do not need to specify the '.' when entering the extension.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can check for file extensions using one of the 'Extension Contains', 'Extension Equals', 'Extension Does Not Contain' options.

i The *Attachment Name* criterion is only shown when you have already selected YES for the *Has Attachment* criterion.

The screenshot shows a rule configuration window titled 'Condition 1'. The 'Mail size' criterion is selected. There are two fields: 'CONDITION' and 'EXCEPT'. The 'CONDITION' field contains the value '>10000'. The 'EXCEPT' field contains the value '<20000'. Each field has a small 'x' icon to its right. Help icons (?) are visible next to both fields.

Mail Size

Used to detect the size (in bytes) of the mail.

You can enter a byte value in the CONDITION field and use the '=', '>', '<', '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

6.4.2.7 IM – Instant Messaging

IM activity lets you detect instant messaging conversations and group chats for popular IMs such as: Facebook, Skype, Slack etc. You can detect both incoming and outgoing messages, detect the participants and search the message body for keywords or text.

6.4.2.7.1 Rule Examples

- Restrict messages to/from select contacts.
- Detect if a user is in contact with suspicious people or criminal groups.
- Monitor support chat conversations to improve quality of customer service and SLA.

- Get notified if the chat body contains specific keywords or sensitive phrases such as lawsuit threats, angry sentiments, sexual harassment etc.

6.4.2.7.2 Rule Criteria

The table below shows what criteria the IM activity supports and what conditions you can use with them.



Any

Lets you detect if an IM is sent or received.

i If you use this option without any other criteria, Teramind will trigger the rule anytime an IM is sent or received.



Message Body

Used for detecting text inside the message body.

You can choose from 'Contains' or 'RegExp' with any text. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.


Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.



Message Direction

Lets you detect if the message is being sent or received.

Select either the INCOMING or OUTGOING option.

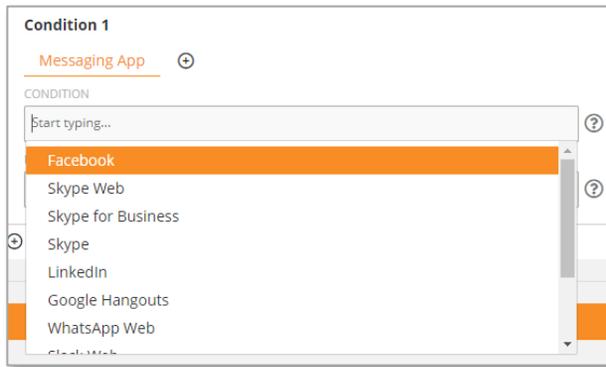

Messaging App

Used to specify the messaging app you want to detect.

You can choose from 'Facebook', 'Skype Web', 'Skype for Business', 'LinkedIn', 'Google Hangouts', 'WhatsApp Web', 'Slack Web', 'Slack', 'Microsoft Team Web' and 'Microsoft Team'. Teramind keeps adding support for new apps so you might see more clients than mentioned here.

Similarly, you can exclude any app(s) you do not want to track in the EXCEPT field.



Contact Name

Used to detect the contacts/participants of the IM conversation.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text as conditions.

Similarly, you can exclude any contacts you do not want to track in the EXCEPT field.

6.4.2.8 Browser

Browser activity lets you detect any installed browser, plugins or extensions, what they are doing or what data they are accessing.

6.4.2.8.1 Rule Examples

- Restrict the use of a browser such as an older version of a browser that has security flaws.
- Block user installation browser plugins and extensions by regular users to prevent malware infection and prevent security or privacy breaches.
- Prevent a plugin from utilizing certain permissions such as the ability to access critical proxy settings or user data.

6.4.2.8.2 Rule Criteria


The table below shows what criteria the Browser activity supports and what conditions you can use with them.



Any

Lets you detect if a browser is launched/activated.

i If you use this option without any other criteria, Teramind will trigger the rule anytime a plugin is launched or activated.

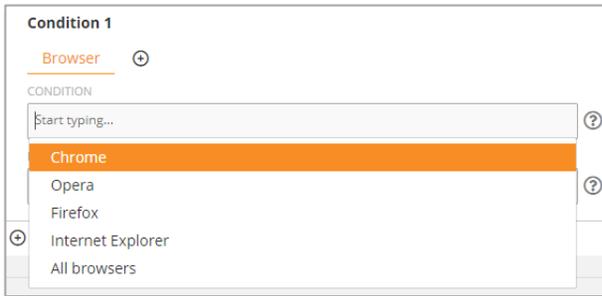


Browser

Used to specify the browser you want to detect.

You can choose from 'Chrome', 'Opera', 'Firefox', 'Internet Explorer' or 'All Browsers'. Teramind keeps adding support for new browsers so you might see more clients than mentioned here.

Similarly, you can exclude any client(s) you do not want to track in the EXCEPT field.

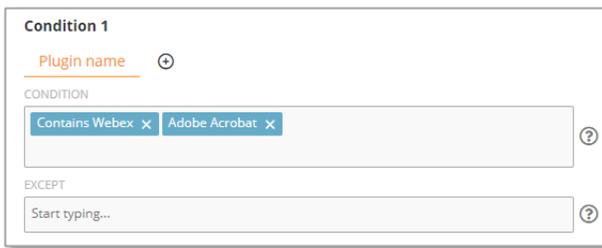


Plugin Name

Used to specify the plugin you want to detect.

You can choose from 'Contains', 'RegExp' or exact match with any text as conditions.

Similarly, you can exclude any plugins you do not want to track in the EXCEPT field.

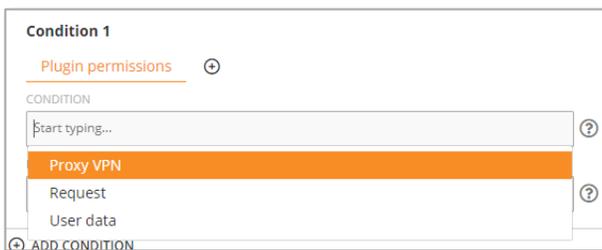

Plugin Permissions

You can detect what permissions the plugin is using.

You can choose any of these conditions:

- **Proxy VPN** - detects if the plugin is accessing the browser's proxy settings.
- **Request** - detects if the plugin is making a web request. This permission allows a plugin to observe and analyze traffic and intercept, block, or modify web requests.

- **User Data** - detects if the plugin is accessing any user data such as cookies.

Similarly, you can exclude any permission you do not want to track in the EXCEPT field.

6.4.2.9 Printing

The Printing activity lets you detect print jobs across local or network printers. You can use criteria, such as: the document and printer and number of pages being printed.

6.4.2.9.1 Rule Examples

- Prevent data leaks over hardcopies by restricting what documents can be printed.
- Warn the user about large print jobs to reduce waste.
- Restrict how many pages can be printed in a certain printer to reduce expense when taking an expensive/color print.
- Implement printer use policies by users/departments. For example, which departments/users can use which printer, how much or what they can print.

6.4.2.9.2 Rule Criteria

The table below shows what criteria the Printing activity supports and what conditions you can use with them.

Any

Lets you detect if any print job is sent to the printer.

i If you use this option without any other criteria, Teramind will trigger the rule anytime a print job is sent to the printer.

Document Name

Used to specify the document names you want to detect.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text as conditions.

Similarly, you can exclude any plugins you do not want to track in the EXCEPT field.

Condition 1

Printer name ⓘ

CONDITION

Equals HP Officejet 8710 ✕ ⓘ

EXCEPT

Start typing... ⓘ

Printer Name

Used to specify the printers you want to track.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text as conditions.

Similarly, you can exclude any plugins you do not want to track in the EXCEPT field.

Condition 1

Number of pages ⓘ

CONDITION

> 50 ✕ ⓘ

EXCEPT

Start typing... ⓘ

Number of Pages

Used to detect the number of pages of the document being printed.

You can enter a page value in the CONDITION field and use the '=', '>', '<', '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

6.4.2.10 Networking


The Printing activity lets you detect print jobs across local or network printers. You can use criteria, such as: the document and printer and number of pages being printed.

6.4.2.10.1 Rule Examples

- Implement network security related rules, for example, restrict outgoing internet traffic from the payment server (to comply with PCI DSS regulation).
- Limit network access such as, disable login via RDP (Remote Desktop Protocol).
- Implement geo-fencing, for example, restrict access to your EU server from the US users.
- Get notified when abnormal network activity (i.e. sudden spike in network traffic) is detected which might indicate an intrusion.

6.4.2.10.2 Rule Criteria


The table below explains what criteria the Printing activity supports and what conditions you can use with them.

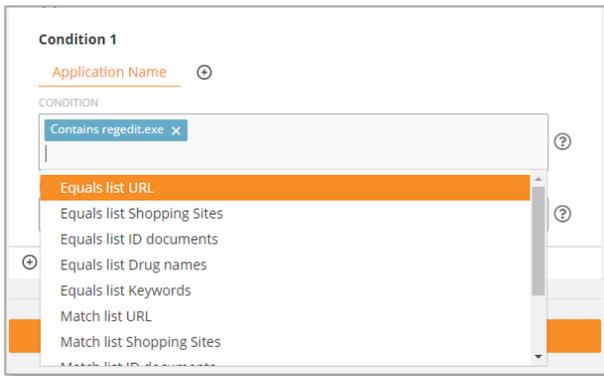

Application Name

You can enter any text in the CONDITION field and choose from 'Contains', 'Equals' or 'Match RegExp'. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any applications you do not want to track in the EXCEPT field.

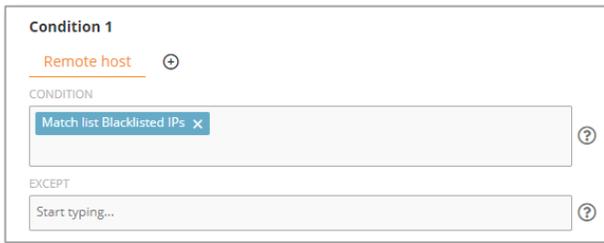

Remote Host

Used to specify the network the remote host is connected to.

You can enter a host address (such as: `google.com`) in the CONDITION field and choose the 'Match List' option. Or, you can select a Shared List (Network-based) and specify a 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any network you do not want to track in the EXCEPT field.



Remote Port

Used to detect the port of the network connection.

You can enter a port value in the CONDITION field and use the '=' logic.

Similarly, you can use the EXCEPT field to specify an exception.

Bytes Sent

Used to specify the number of bytes sent over the network connection.

You can enter a byte value in the CONDITION field and use the '=', '>' or the '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

Bytes Received

Used to specify the number of bytes received over the network connection.

You can enter a byte value in the CONDITION field and use the '=', '>' or the '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

6.4.3 Content Sharing Rules: What Contents Trigger the Rules?

Content Sharing rules are used to detect content or text inside an object. The object can be a file, an email or IM chat, data in the clipboard or even any text displayed on the screen. You can use these powerful rules to prevent data exfiltration attempts, such as: block transferring of a file when it contains credit card numbers; warn a user when they attempt to send emails containing sensitive keywords etc.


You can specify the detection criteria for the Content Sharing rules in two places:

- On the special *Content* Tab: This tab allows you to define what makes the content sensitive and specify the data values to look for. This tab is automatically added when you select the *Content Sharing* rule type (in the **General** tab).
- On the selected *Content Type* Tabs: For example, if you selected Clipboard and Emails from the *Type of Content* section (in the **General** tab), you will have two tabs called 'Clipboard' and 'Emails' where you can add the rule conditions and values.

The basic premise of the Content Sharing rule is: you describe the data in the *Content* tab and then you tell Teramind where to look for that data in the *Content Type* Tabs. You need to use both of them for creating a Content Sharing rule.

6.4.3.1 The Content Tab


This tab allows you to define what makes the content sensitive and specify the values to look for. You need to select at least one *Types of Content*, such as: Clipboard, File etc. to be able to use the Content tab.

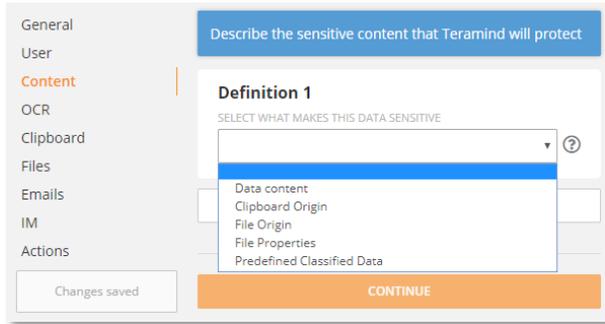

You can select from different data definitions depending on what *Types of Content* you have selected in the **General** tab (i.e. Clipboard, Files, Emails, IM).

For example, if you have selected the Clipboard content type, then you will see the 'Clipboard Origin' in the data definition list.

The table below shows what criteria the Content definition supports and what conditions you can use with them.

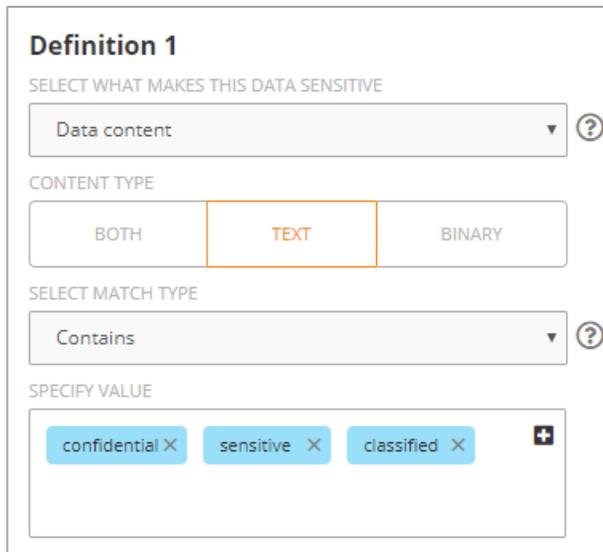

Data Content

Data Content is a generic criterion that can be used to look for any text or binary data. For example, by using it with the Clipboard, you can detect anything copied on the clipboard.

You can select TEXT, BINARY or BOTH as the CONTENT TYPE.

For SELECT MATCH TYPE, you can choose 'Contains', 'Equals' or 'RegExp' and specify the text or binary values in the bottom field. Use the **+** button to add multiple values. Or, you can choose 'Match List Member' or 'Equals List Member' as a match type and then select a Shared List (Text-based or Regular Expressions-based) from the SELECT SHARED LIST drop-down menu. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

i The *Data Content* criterion can be used with any content types (i.e. Files, Email etc.).

Clipboard Origin

Clipboard Origin detects data pasted into the clipboard from a specific webpage or application. By using it you can, for example, build a rule that prevents copy pasting of customer data from your CRM site.

You can select WEBPAGE or APPLICATION as the source of the clipboard copy operation.

For SELECT MATCH TYPE, you can choose 'Contains', 'Equals' or 'RegExp' and specify the text values in the bottom field. Use the **+** button to add multiple values. Or, you can choose 'Match List Member' or 'Equals List Member' as a match type and then select a Shared List (Text-based or Regular Expressions-based) from the SELECT URL or SELECT NAME drop-down menu. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

i The *Clipboard Origin* criterion can only be used with the Clipboard content type.

SHARE CLOUD URL

SELECT MATCH TYPE

Equals

EQUALS

\\fileservers\shared

Definition 1

SELECT WHAT MAKES THIS DATA SENSITIVE

File Origin

SELECT FILE ORIGIN

SHARE CLOUD URL

SELECT CLOUD PROVIDERS

Dropbox Google drive OneDrive

FILE PATH

Equals sensitive_files

SHARE CLOUD URL

SELECT MATCH TYPE

Matches list member

SELECT SHARED LIST

Shopping Sites

File Origin

File Origin detects file sharing based on its origin or source. It supports local, Cloud and web sharing. By using it you can, for example, build a rule that prevents sharing of files to Cloud drives.

You can select from several sharing options under the SELECT FILE ORIGIN section. SHARE = any type of network shares, CLOUD = sharing over Cloud services, such as, Dropbox and URL = sharing over any websites.

Depending on which origin (SHARE / CLOUD / URL) you selected, you can choose from 'All Share', 'Contains', 'Equals' or 'RegExp' in the SELECT MATCH TYPE field and specify the text values in the bottom field. Use the + button to add multiple values. Or, if available, you can choose the 'Match List Member' or 'Equals List Member' as a match type and then select a Shared List (Network-based) from the SELECT URL or SELECT NAME drop-down menu. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

i The *File Origin* criterion can only be used with the Files content type.

Definition 1

SELECT WHAT MAKES THIS DATA SENSITIVE

File Properties

FIELD TYPE

ANY STRING INTEGER DATE

FIELD NAME


Tags

SELECT MATCH TYPE

Equals

SPECIFY VALUE

internal only

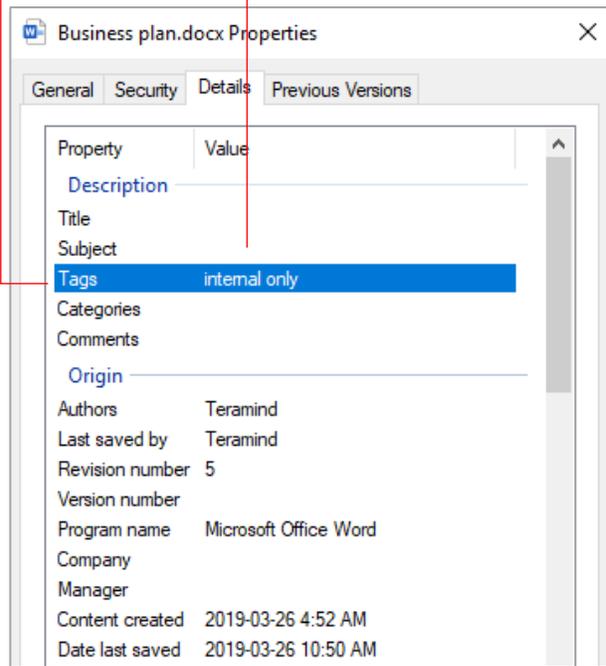

A File Properties window in Windows Explorer

File Properties

File Properties detect files based on their meta-tags (also known as 'file property' or 'field'). By using it you can, for example, build a rule that prevents sharing of any documents outside your company that has a *Tags* property containing the string value of 'internal only'. You can create such tags/fields/properties from an application (such as Microsoft Word) or from the Windows Explorer. You can select ANY, STRING, INTEGER or DATE for the FIELD TYPE.

If needed, enter the name of the field/property in the FIELD NAME.

If you select the STRING field type, you can choose from 'Contains', 'Equals' or 'RegExp' in the SELECT MATCH TYPE field and specify the text values to detect in the SPECIFY VALUE field. Use the **+** button to add multiple values. Or, you can choose the 'Match List Member' or 'Equals List Member' as a match type and then select a Shared List from the SELECT URL or SELECT NAME drop-down menu. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

If you choose an INTEGER or DATE value, you can choose one of the '=', '>', '<' logics in the MATCH TYPE field and provide a numeric or date value in the SPECIFY VALUE field.

i The *File Properties* criterion can only be used with the Files content type.

Definition 1

SELECT WHAT MAKES THIS DATA SENSITIVE

Predefined Classified Data

SELECT SENSITIVE DATA CATEGORY

Financial Data

Financial Data

Health Data

Personally Identifiable Data

Code Snippets

SELECT SENSITIVE DATA TO DETECT

All credit card numbers

Magnetic data

Magnetic data (Track 1)

Magnetic data (Track 2)

Swift Code

ABA Route Numbers

TRIGGER ON PATTERN FREQUENCY IN CONTENT

5

ADD DEFINITION

Predefined Classified Data

Predefined Classified Data detects content based on pre-defined data categories.

There are several types of data categories you can choose from: Financial Data, Health Data, Personally Identifiable Data etc.

The SENSITIVE DATA TO DETECT field will have different menu options depending on what you choose in the SELECT SENSITIVE DATA CATEGORY field. For example, if you choose Financial Data in the previous field, you can choose from 'All credit card numbers', 'SWIFT code' etc. Or, if you choose the Health Data, you can choose from 'Common drug names', 'DNA profile' etc. Check out the [Appendix](#) section for a list of all the pre-defined classified data supported in Teramind.

Finally, specify how often a data pattern can appear in the content before the rule is triggered in the TRIGGER ON PATTERN... field.

6.4.3.2 Clipboard

The Clipboard content type detects text copied to the clipboard from any applications or websites.

6.4.3.2.1 Rule Examples

- Prevent sharing of customer data outside of your CRM site.
- Warn users when they copy social security numbers from an Excel spreadsheet and paste it on an email client like Outlook.
- Prevent data marked as sensitive in the *Predefined Classified Data* list to be pasted on an image application. So that the user cannot later upload the image to bypass your document upload rules.

6.4.3.2.2 Rule Criteria


The table below shows what criteria the Clipboard supports and what conditions you can use with them.



Any

Lets you detect the clipboard text in any applications or websites.

i If you use this option without any other criteria, Teramind will trigger the rule anytime a clipboard paste operation is performed in any applications or websites where the content is detected.

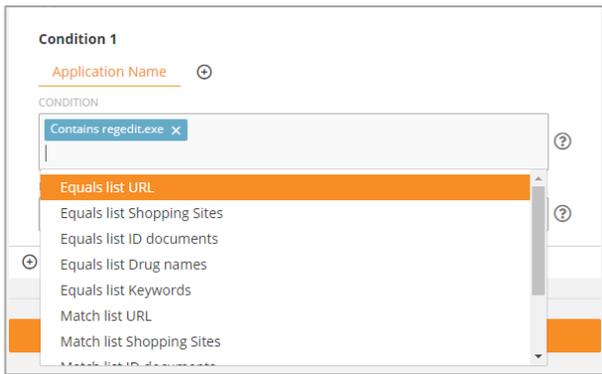


Application Name

Used to specify the applications in which the clipboard action will be detected.

You can choose from 'Contains', 'Equals' or 'Equals List' with any text as conditions. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Equals List' or 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any applications you do not want to track in the EXCEPT field.

i The *Application Name* and the *Webpage URL* criterion cannot be used together in the same condition block.

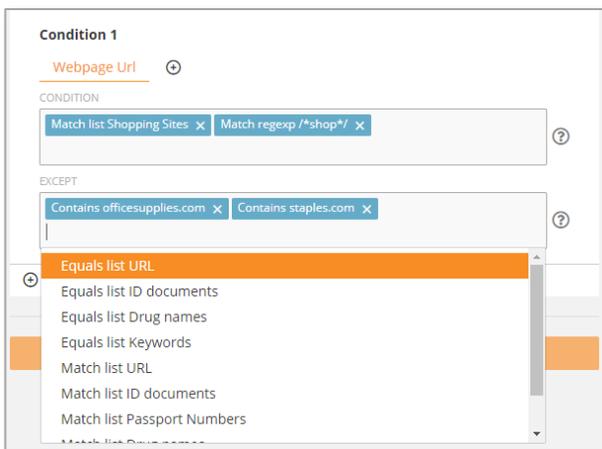

Webpage URL

Used to specify the webpage URL (website address) in which the clipboard action will be detect.

You can enter any text in the CONDITION field and choose from 'Contains', 'Equals' or 'Match RegExp'. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any URLs in the EXCEPT field.

i The *Application Name* and the *Webpage URL* criterion cannot be used together in the same condition block.

6.4.3.3 Files

Files content type works in the same way as it does in the [Files Activity rules](#). However, there are certain file operations that you cannot use in the Content Sharing rules. For example, the *Download* operation or none of the *folder* operations are supported.

Note that not all criteria are available for all file operations. Teramind will automatically show or hide the criteria based on which file operation you select. So, if you select the *Access* or the *Delete* operation, you will only see the *Program* criterion. Some file operation may have additional detection criteria. For example, the *Upload* operation lets you specify the *Upload URL*.



Select a file operation by clicking the CONDITION filed.

Click the **+** button to add a criterion to the operation.

i If you choose the 'Any' file operation without any other criteria, Teramind will trigger the rule for any file operation where the content is detected.

6.4.3.3.1 Rule Examples


- Prevent sharing of files that contain sensitive information, such as: Credit Card Numbers, Social Security Numbers, Health Records or your own custom data type.
- Prevent sharing of a file based on certain properties, such as, when a document contains a 'confidential' watermark.
- Create rules based on file origin, such as, stop all network sharing from certain applications.



These are some examples of Content Sharing rules for Files. For other examples of the Files rules, check out the [Files Activity](#) rule examples.

6.4.3.3.2 Rule Criteria

The table below describes the criteria you can use for the Files sharing rules, and which file operations are supported for each criterion.

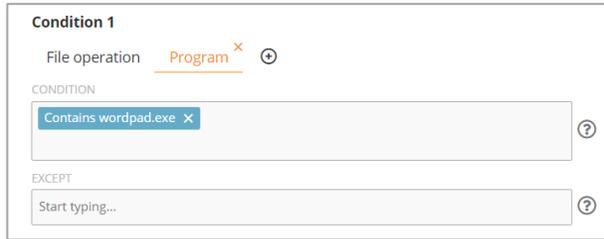


Program

Lets you specify in which program/app the file operation took place.

You can choose from 'Contains', 'Equals' or 'Match RegExp'.

Similarly, you can exclude any programs you do not want to track in the EXCEPT field.

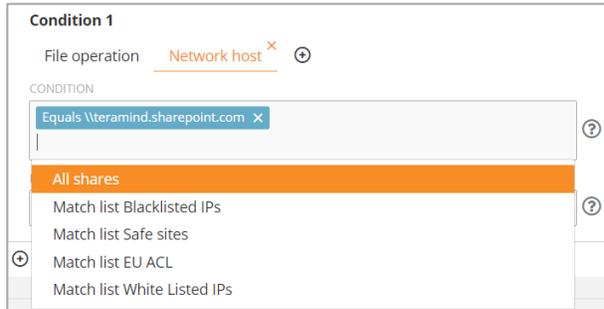

Network Host


Used for network-based file operations.

Detects the host name of the file operation. For example: `http://sharepoint.com`, `ftp://filevault.net` etc.

You can choose from 'Contains', 'Equals', 'All Shares'. Or, you can select a Shared List (Network-based) and specify a 'Match List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any hosts you do not want to track in the EXCEPT field.

i This criterion is only supported in the *Write* and *Copy* operations.

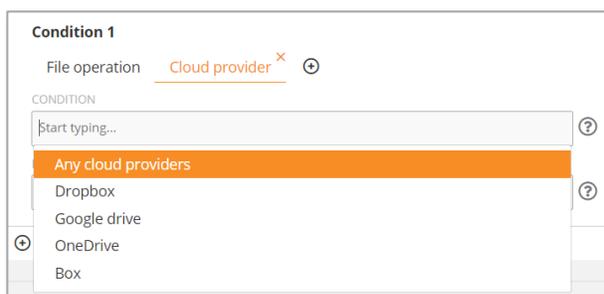

Cloud Provider

Used to detect cloud providers.

You can choose from 'All Cloud Providers', 'Dropbox', 'Google Drive', 'OneDrive' or 'Box'.

Similarly, you can exclude any provider you do not want to track in the EXCEPT field.

i This criterion is only supported in the *Write* and *Copy* operations.

The screenshot shows a configuration window for 'Condition 1'. The 'File operation' is set to 'RDP File Transfer'. Below this, there are two radio button options: 'NO' and 'YES'. The 'YES' option is selected. A help icon (?) is visible to the right of the 'YES' option.

RDP File Transfer

Detects if the file copy operation is done over an RDP (Remote Desktop Protocol) session. This happens when you connect to a remote computer and copy files to/from it.

You can select either YES or NO.

i This criterion is only supported in the *Copy* operation

The screenshot shows a configuration window for 'Condition 1'. The 'File operation' is set to 'Upload URL'. Below this, there are two input fields: 'CONDITION' and 'EXCEPT'. The 'CONDITION' field contains the text 'Start typing...'. The 'EXCEPT' field contains the text 'Contains teramind.co'. Both fields have help icons (?) to their right.

Upload URL

You can choose from 'Contains', 'Equals' or 'RegExp'. Or, you can select a Shared List and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any URLs you do not want to track in the EXCEPT field.

i This criterion is only supported in the *Upload* operation.

The screenshot shows a configuration window for 'Condition 1'. The 'File operation' is set to 'External Drive'. Below this, there is a single radio button option labeled 'YES', which is selected. A help icon (?) is visible to the right of the 'YES' option.

External Drive

You do not need to specify any conditions in this criterion.

i This criterion is only supported in the *Write* and *Copy* operations.

6.4.3.4 Emails

Files content type works in the same way as it does in the [Email Activity rules](#). Except, the *Mail Body* criterion is not supported.

Emails lets you detect content sharing over outgoing and incoming emails including any email attachments.

6.4.3.4.1 Rule Examples

- Detect sensitive information like Credit Card Numbers, Social Security Numbers, Health Records or your own custom data types inside attachments and act based on what's detected.
- Detect if an internal memo is shared outside the company.
- For example, warn the user when sending out an email that contains a document containing contacts to prevent data exfiltration or comply with privacy laws.



These are some examples of Content Sharing rules for Emails. For other examples of the Emails rules, check out the [Emails Activity](#) rule examples.

6.4.3.4.2 Rule Criteria

The table below shows what criteria the Emails sharing supports and what conditions you can use with them.

Condition 1
Any ⓘ
Capture any actions

Any

Lets you detect if an email is sent or received.

ⓘ If you use this option without any other criteria, Teramind will trigger the rule anytime an email is sent or received.

Condition 1
Mail Subject ⓘ

CONDITION

Contains important x Contains urgent x Contains official x
Contains sensitive x Contains confidential x ⓘ

EXCEPT

Start typing... ⓘ

Mail Subject

Used for detecting text inside the mail subject.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.

Condition 1

Mail CC ⊕

CONDITION

Contains legal × Contains Nethan × ?

EXCEPT

Contains teramind.co × ?

Mail CC

Detects the CC addresses in an email.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can select a Shared List (Text-based or Regular Expressions-based) and specify a 'Match List' or 'Equals List' condition. Check out the [Shared List](#) section on the Teramind User Guide to learn how to create shared lists.

Similarly, you can exclude any text/list you do not want to track in the EXCEPT field.

Condition 1

Mail To ⊕

CONDITION

Start typing... ?

EXCEPT

Contains teramind.co × ?

Mail To

Similar to *Mail CC* criterion but used to detect the *Mail To* addresses instead.

Condition 1

Mail From ⊕

CONDITION

Contains .ch × Contains .pl × Contains competitor × ?

EXCEPT

Start typing... ?

Mail From

Similar to *Mail CC* and *Mail To* criterion but used to detect the *Mail From* addresses instead.

Condition 1

Mail Direction ⊕

INCOMING ? OUTGOING

Mail Direction

Lets you detect if the mail is being sent or received.

Select either the INCOMING or OUTGOING option.

Mail Client

Used to specify the mail client you want to detect.

You can choose from 'Gmail', 'Outlook Client', 'Outlook Web Client', 'Live.com', 'Yahoo Mail', and 'Yandex Mail'. Teramind keeps adding support for new clients so you might see more clients than mentioned here.

Similarly, you can exclude any client(s) you do not want to track in the EXCEPT field.

Has Attachments

Used to detect if the mail has any attachment.

Select either the YES or NO option.

Attachment Name

Used to detect the names or extensions for the attached files. File extension are used to identify a file type and usually starts with a '.' (dot). For example: *.doc*, *.pdf* etc. Note: you do not need to specify the '.' when entering the extension.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text. Or, you can check for file extensions using one of the 'Extension Contains', 'Extension Equals', 'Extension Does Not Contain' options.

i The *Attachment Name* criterion is only shown when you have already selected YES for the *Has Attachment* criterion.

Condition 1

Mail size ⓘ

CONDITION

>10000 x ⓘ

EXCEPT

<20000 x ⓘ

Mail Size

Used to detect the size (in bytes) of the mail.

You can enter a byte value in the CONDITION field and use the '=', '>', '<', '>=' logics.

Similarly, you can use the EXCEPT field to specify an exception.

6.4.3.5 IM

IM content type works in the same way as it does in the [IM Activity rules](#). Except, the *Message Body* criterion is not supported.

IM lets you detect content sharing over instant messaging conversations and group chats for popular IMs such as: Facebook, Skype, Slack etc. You can detect both incoming and outgoing messages, detect the participants and search in the message body for keywords or text.

6.4.3.5.1 Rule Examples

- Improve productivity and data security. For example, detect if customer service agents are not responding to complaints or queries coming through your Instant Messaging channels.
- Create rules that warn the HR about angry exchanges, harassments or other potential negative sentiments in chat conversations.
- Detect if a user is targeted for phishing or social engineering online.



These are some examples of Content Sharing rules for IM. For other examples of the IM rules, check out the [IM Activity](#) rule examples.

6.4.3.5.2 Rule Criteria

The table below shows what criteria the IM sharing supports and what conditions you can use with them.

Condition 1

Any ⓘ

Capture any actions

Any

Lets you detect if an IM is sent or received.


i If you use this option without any other criteria, Teramind will trigger the rule anytime an IM is sent or received where the content is detected.



Message Direction

Lets you detect if the message is being sent or received.

Select either the INCOMING or OUTGOING option.

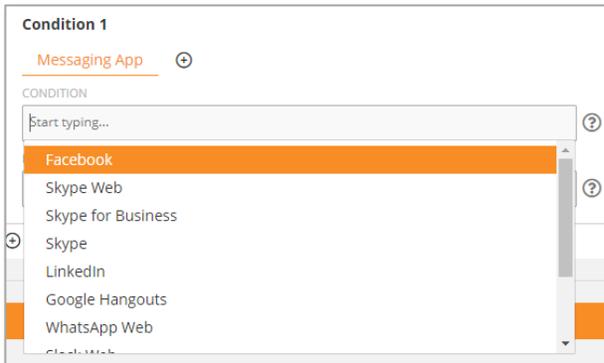

Messaging App

Used to specify the messaging app you want to detect.

You can choose from 'Facebook', 'Skype Web', 'Skype for Business', 'LinkedIn', 'Google Hangouts', 'WhatsApp Web', 'Slack Web', 'Slack', 'Microsoft Team Web' and 'Microsoft Team'. Teramind keeps adding support for new apps so you might see more clients than mentioned here.

Similarly, you can exclude any app(s) you do not want to track in the EXCEPT field.



Contact Name

Used to detect the contacts/participants of the IM conversation.

You can choose from 'Contains', 'Equals' or 'RegExp' with any text as conditions.

Similarly, you can exclude any contacts you do not want to track in the EXCEPT field.

7 Creating Anomaly Rules

Anomaly rules are special types of rules that allow you to identify anomalies in a user’s behavior by utilizing behavioral baselines. It also allows you to assign risk levels to any anomalous behavior and a notification action to inform admins or managers about the anomaly.

The Anomaly Rules Editor is an intuitive, visual editor where you can create sophisticated behavioral-anomaly rules on a single screen.


To access the Anomaly Rules Editor, create a new anomaly rule or edit an existing rule from the **Behavior > Anomaly rules** menu.

7.1 Rule Examples

- Detect when employees spend more than certain percentage of their workhours on unproductive or entertainment sites such as Facebook, YouTube etc.
- Detect if an employee is idling for too long.
- Get notified if an employee’s productivity drops by certain rate.
- Get notified when a user sends an unusual number of emails than they normally do in a day-to-day basis.
- Detect if the file upload activity of a user exceeds some threshold.
- Detect if your network activity suddenly spikes or drops indicating something unusual happening.

7.2 Setting Up the Rule Basics

You specify the basic settings for an anomaly rule on the Anomaly Rules Editor’s **General Settings** section.

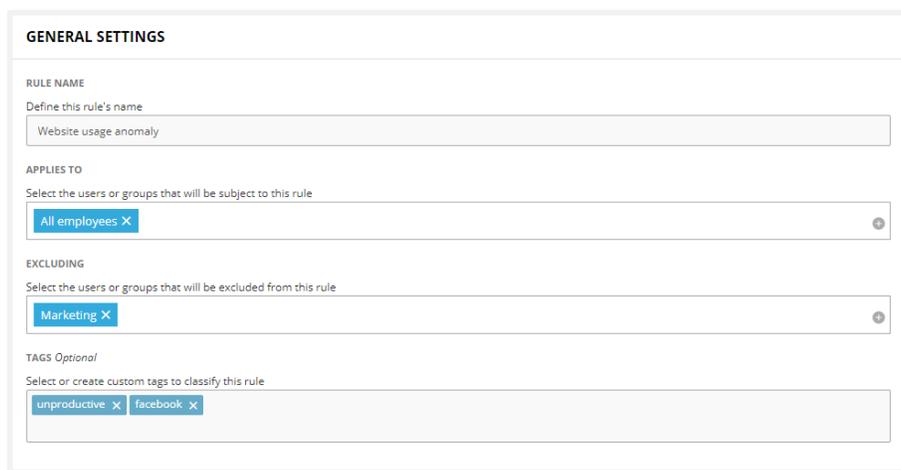

The screenshot shows the 'GENERAL SETTINGS' section of the Anomaly Rules Editor. It contains four main fields:

- RULE NAME:** A text input field with the placeholder text 'Define this rule's name' and the value 'Website usage anomaly'.
- APPLIES TO:** A selection field with the label 'Select the users or groups that will be subject to this rule' and the selected value 'All employees X'.
- EXCLUDING:** A selection field with the label 'Select the users or groups that will be excluded from this rule' and the selected value 'Marketing X'.
- TAGS:** A selection field with the label 'TAGS Optional' and 'Select or create custom tags to classify this rule', containing the tags 'unproductive X' and 'facebook X'.

You can specify a name for the rule in the RULE NAME field. You can select which users, groups, departments or computers the rule will apply to in the APPLIES TO field. If you select a computer, the rule will apply to all the users on that computer. Optionally, you can exclude anyone you don’t want to be included using the EXCLUDING field. You can also specify the rule’s tags in the TAGS field. Tags are

keywords you can assign to a rule to easily identify it. They are useful in searching for the rule and can also be used as filters on various reports (i.e. Risk or Alerts report).

7.3 Detection Criteria - What Behavioral Anomalies Trigger the Rules?

You define the detection criteria under the RULE TRIGGER section of the Anomaly Rules Editor.

RULE TRIGGER

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Webpages

CONDITIONS

Select parameters for this rule

Url Equals youtube.com *

Time (%) > 20 ✕

ADD CONDITION

You can select an action that will trigger the rule and then specify the conditions to evaluate. There are several types of actions you can choose from: Applications, Websites, Emails, Activity, Files, Network etc.

Each action has different conditions you can select from, such as: Time, Name, Anomaly Baseline etc. After you have selected a condition, you can choose a logic, such as: '>', '<', 'Equals' etc. from the middle field. Finally, you specify value(s) to detect in the right-most field.

You can add multiple conditions to an action by clicking the ADD CONDITION button. For example, you can create an anomaly rule using the *URL* condition and a *Time* condition with a *Websites* action to detect if a user spent >20% in 'youtube.com'.

In the next few sections, we will walk you through all the available options for setting detection criteria for each action type.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Applications

CONDITIONS

Select parameters for this rule

Time (%) > 20 *

Time

Detects time spent (%) in an application or website.

Enter a percent value and use the '>' or '>=' logic for the condition.

i This condition is only supported in the *Applications* and *Webpages* actions.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Applications

CONDITIONS

Select parameters for this rule

Name Equals excel *

Name

Used to specify a name for an application.

Enter a text value and use the 'Equals', 'Contains', 'Does Not Contain' 'Regular Expression Match', or 'Regular Expression Not Match' logic for the condition.

i This condition is only supported in the *Applications* action.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Webpages

CONDITIONS

Select parameters for this rule

Url Equals youtube.com *

URL

Used to detect the URL of a webpage.

Enter a text value and use the 'Equals', 'Contains', 'Does Not Contain' 'Regular Expression Match', or 'Regular Expression Not Match' logic for the condition.

i This condition is only supported in the *Webpages* action.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Emails: All

CONDITIONS

Select parameters for this rule

Threshold count > 10 *

Threshold Count

Sets the threshold count for how many times an activity occurs before triggering the rule. For example, no. of emails sent, no. of download operation, no. documents printed etc.

Enter a number value and use the '>' or '>=' logic for the condition.

i This condition is supported in all actions except for *Applications* and *Webpages*.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Activity: Productivity ▼

CONDITIONS

Select parameters for this rule

Productivity ▼ < ▼ 80 *

Productivity

Detects the productivity level (in percent) of a user. To learn more about how productivity is measured in Teramind, check out the [BI Reports > Productivity](#) section on the Teramind User Guide.

Enter a percent value and use the '<', '>' or '>=' logic for the condition.

i This condition is only supported in the *Activity: Productivity* action.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Activity: Idle rate ▼

CONDITIONS

Select parameters for this rule

Rate ▼ > ▼ 10 *

Rate

Detects the idle rate (in percent) of a user. To learn more about how idle rate is measured in Teramind, check out the [BI Reports > Productivity](#) section on the Teramind User Guide.

Enter a percent value and use the '>' or '>=' logic for the condition.

i This condition is only supported in the *Activity: Idle Rate* action.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Network: Data In ▼

CONDITIONS

Select parameters for this rule

Size (MB) ▼ > ▼ 0 *

Size

Detects the size (in Mega Bytes) of data in a network operation.

Enter a value in Mega Bytes and use the '>' or '>=' logic for the condition.

i This condition is only supported in the *Network: Data In* and *Network: Data Out* actions.

WHAT TRIGGERS THE RULE

Select the action which the rule will be built upon

Documents printed ▼

CONDITIONS

Select parameters for this rule

Anomaly baseline ▼ IS Department ▼ *

Anomaly Baseline

Anomaly Baseline uses algorithm to determine if certain user behavior is outside a baseline. This can be the user's current behavior compared to their past behavior; an employee's behavior compared to their departmental baseline; or an employee's behavior compared to the baseline of the entire organization. Using a baseline lets you, for example, set an anomaly rule to notify you when a user sends an unusual number of emails than they normally do in a day-to-day basis.

You can select either the 'Company', 'Department' or the 'Self' as the rule's condition.

8 Defining Rule Actions

Actions let you specify what the system will do when a rule is violated. You can warn a user or block them, receive notification, record a video of the desktop etc.


You can assign actions to a rule from the **Actions** tab on the [Rules Editor](#) for regular rules. Or, from the **RULE ACTIONS** section on the [Anomaly Rules Editor](#) for anomaly rules.

Note that, not all rule categories support all actions. For example, the Agent Schedule only supports the NOTIFY action for most of its schedule violation types except for the *Login* and *Idle* activities. Same way, different Types of Activity / Types of Content may also have their own special actions. For example, Webpages have an action called REDIRECT which is not available for other activity. Also, not all actions are available on all the operation systems. For example, the LOCK OUT USER action does not work on the macOS at the moment.

 Note that, [Anomaly Rules](#) only support the Notify action.

In some cases, you can use multiple actions as long as they do not conflict with each other. For example, you can use the NOTIFY and BLOCK actions together as they do different things. But you cannot use the BLOCK and LOCK OUT USER actions together because they both prevent the user from completing an activity. The Rules Editor will automatically disable actions that conflict with the currently selected action(s).

Here are the actions you can use:

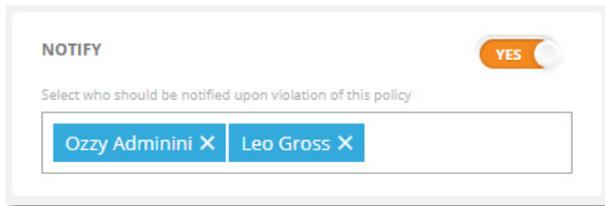

Notify

Teramind will send an email notification to the specified email accounts whenever any user violates the rule.

You can manage how such notification emails are handled from the Settings screen. See the [Changing the Email Notification Settings](#) section to learn more.

BLOCK

MESSAGE
If present, show the following warning message to the user

Uploading data to personal Cloud drives is prohibited. Pleas

USE HTML TEMPLATE

Block

Blocks the user activity and shows a message. You can use a HTML template to display the message. See the [Configuring the Alert Template](#) section to learn more.

If you are using the HTML template option, you can use simple HTML tags in the message itself. For example, you can put a link in the message to your company policy to refresh the user's knowledge, like this:

```
Uploading data to personal Cloud drives is prohibited. Please <a href='www.abc.com/policy'>click here</a> to read the policy.
```

You can also specify how long Teramind should wait between multiple alert messages that the user sees. See the [Changing the Alert Wait Time](#) to learn more.

LOCK OUT USER

MESSAGE
If present, show the following warning message to the user

You were locked out because you ran a dangerous applicati

Lock Out User

Shows a warning message to the user and then when they press the OK button, they are locked out of the system. If the user logs back in, they will be logged out automatically. An administrator has to unlock the user for them to be able login again. Check out the [Employee Action Menu](#) section on the Teramind User Guide for more information on unlocking a user.

 This action works on Windows only

REDIRECT

URL
Applies to Webpages only. Redirects agent to specified URL upon violation

https://www.teramind.co/online-policy

Redirect

Redirects the user to a different website when they try to access certain URL(s).

 This action is available to Websites-based rules only.

WARN

MESSAGE
If present, show the following warning message to the user

You should not spend more than 10 min on unproductive si

USE HTML TEMPLATE

Warn

Warns a user with a message. Similar to the message in the *Block* action, you can use a HTML template to display the warning message.

You can specify how long Teramind should wait between multiple alert messages that the user sees. See the [Changing the Alert Wait Time](#) to learn more.

SET USER'S ACTIVE TASK

While the user is triggering this rule, set the user's task to a custom value.

Build

Set User's Active Task

You can automatically assign the user a task based on their activities.

You can specify how long Teramind will wait before assigning a new task to a user. Check out the [Changing the Task Selection Timeout](#) section to learn more.

i Applicable only if the user is using a Stealth Agent.

RECORD VIDEO

MINUTES BEFORE VIOLATION

MINUTES AFTER VIOLATION

Record Video

If video recording is disabled in your Screen monitoring settings, you can still record a video of the rule violation incident with this action. The system will automatically record for the specified number of minutes before and after the incident.

COMMAND

When this rule is violated, the following command will be executed on the endpoint as the user:

WINDOWS COMMAND:

shutdown /s /f /t 0

Command

With this action, you can execute a Windows command automatically when a rule is violated.

This is a powerful action as it allows you to run any application or script on the user's computer. For example, you can force shutdown the pc (`shutdown /s /f /t`


0), kill a task (`taskkill -im explore.exe`) and do much more.

 This action works on Windows only


8.1 Customizing the Rule Messages and Alerts

Alerts tab allows you to define how rule violation messages will be displayed to the users. It's a good idea to customize your alert messages so that they are visually distinctive and match with your company's branding.

To customize the alert template, click the **Gear** icon on the top-right corner of the Teramind Dashboard, then select **Settings** from the pull-down menu.

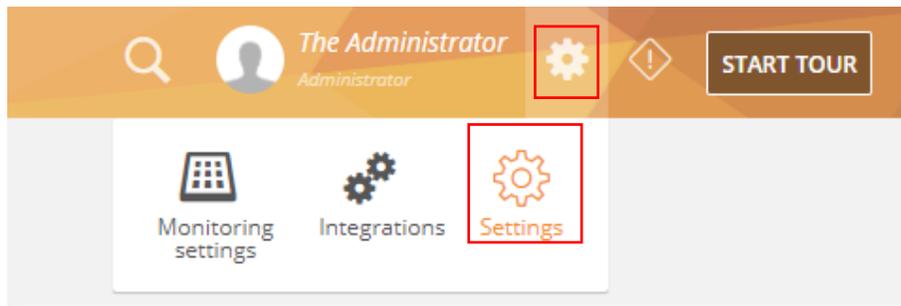

A *Settings* screen will appear. Select the **Alerts** tab from this *Settings* screen.

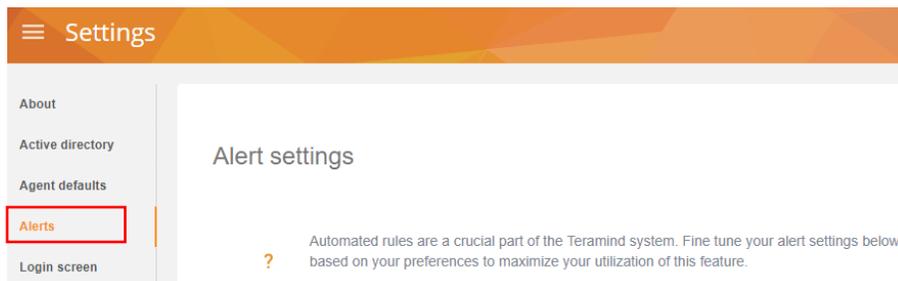

8.1.1 Configuring the Alert Template

The screenshot shows a configuration interface for alert templates. At the top, there is a toggle switch for "USE HTML USER ALERTS BY DEFAULT" set to "NO". Below it is a text area for "CUSTOM USER ALERT HTML" containing the following HTML code:


```
top: 70%;
}

</style>
<div class="customAlert">

<div class="alert-title">
<span class="alert-img"></span>Policy
Violation Detected
</div>

<p class="message">
%ALERT%
</p>
<div style="text-align:center;">
<button class="confirmButton">OK</button>
</div>
</div>
```

Below the text area is a "PREVIEW" button. At the bottom, there are three input fields: "SCREEN LOCATION" (set to "Screen center"), "WIDTH" (set to "480"), and "HEIGHT" (set to "250").

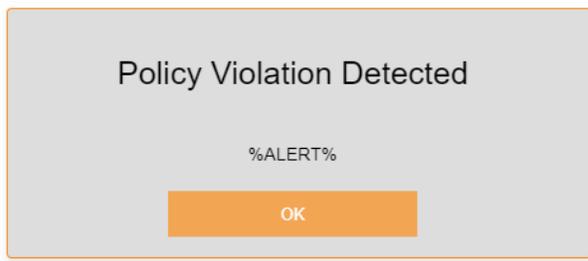

Click the USE HTML USER ALERTS BY DEFAULT button to enable HTML template by default for all rules.

You can customize the look and feel of your message box by editing the HTML in the CUSTOM USER ALERT HTML field. There are a few dynamic variables such as %ALERT%, %DETAILS% you can use in your message. The variables will be replaced by the actual rule message and details when the alert is triggered. In addition, the alert can have buttons like OK and CANCEL. You can also include base64-encoded images in your HTML, for example, to display icons or logos.

You can preview how the alert will look by clicking the PREVIEW button.

SCREEN LOCATION defines where the alert will be displayed (i.e. Center, Top-Left etc.). The WIDTH and HEIGHT fields allow you to change the width and height of the alert box.

8.1.2 Changing the Email Notification Settings

The screenshot shows a configuration field for "ALERT EMAILS LIMIT" with a value of "16".

The *Notify* rule action sends out email notification to selected user(s) when a rule is violated.

The ALERT EMAILS LIMIT setting defines the threshold where the system will group these notification alerts into a single email. The system will send this many identical alert emails, and then it will group them together into an email digest. If set to 0, Teramind will send each notification alert as separate email.


8.1.3 Changing the Alert Wait Time



A screenshot of a configuration field labeled "USER ALERTS THRESHOLD (SECONDS)" with a question mark icon and a value of "120".

USER ALERT THRESHOLD applies to rules with a *Warn* or *Block* action. The threshold sets the minimum time, in seconds, to wait between alerts that the user sees. If set to 0, users will see all alerts they violate, regardless of the frequency.

8.1.4 Changing the Alert Log Limit

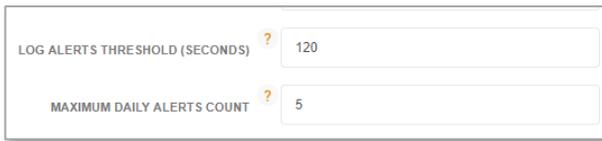

A screenshot of two configuration fields. The first is labeled "LOG ALERTS THRESHOLD (SECONDS)" with a question mark icon and a value of "120". The second is labeled "MAXIMUM DAILY ALERTS COUNT" with a question mark icon and a value of "5".

LOG ALERT THRESHOLD sets the minimum time, in seconds, to wait between logging alerts to the Teramind system. If set to 0, it will not limit the number of alerts that are logged.

MAXIMUM DAILY ALERTS COUNT limits the total number of alerts which get logged by Teramind on a daily basis per alert type.

8.1.5 Changing the Task Selection Timeout




A screenshot of a configuration field labeled "RULE TASK SELECTION ACTION TIMEOUT (SECONDS)" with a question mark icon and a value of "0".

You can build rules in Teramind to set a user's task based on their activity. RULE TASK SELECTION ACTION TIMEOUT (SECONDS) defines the time out when switching tasks. If the user switches activity and remains in the new activity for the defined seconds, the rule will be re-evaluated.

9 Using the Prebuilt Rule-Templates

9.1.1 Using the Regular Rule Templates

When creating a new rule, you can choose from a list of pre-built templates. Click the **CHOOSE A TEMPLATE** pull-down menu to choose a template on the Rules Editor's *General* tab.

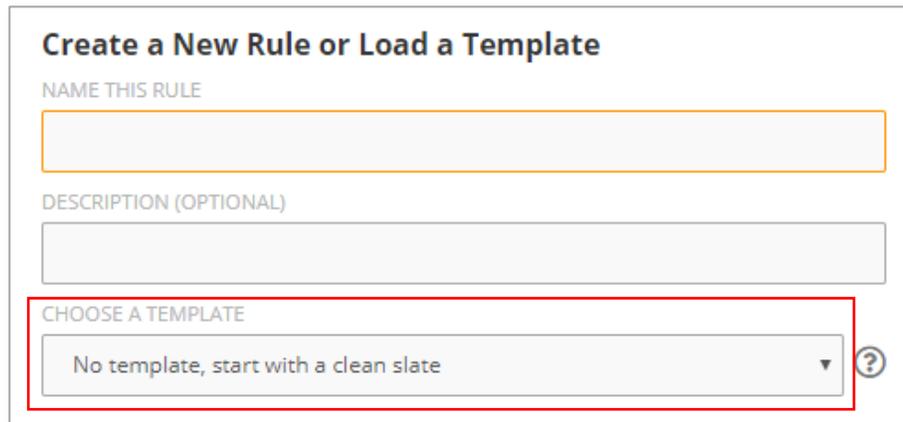

Create a New Rule or Load a Template

NAME THIS RULE

DESCRIPTION (OPTIONAL)

CHOOSE A TEMPLATE


No template, start with a clean slate

Teramind has many templates for Data Loss Prevention, Email, Applications, Websites, File Operations etc. Once you select a template, the rest of the rule's tabs will be automatically populated with pre-configured settings and sample data. You can, of course, change them to meet your needs.

Check out the [Appendix](#) section for a list of all the prebuilt regular rule templates available in Teramind.

9.1.2 Using Anomaly Rule Templates

When creating a new anomaly rule, you can choose from a list of pre-built templates. Click the **USE TEMPLATE** button, then choose a template from the **TEMPLATE TO USE** pull-down menu to choose a template.

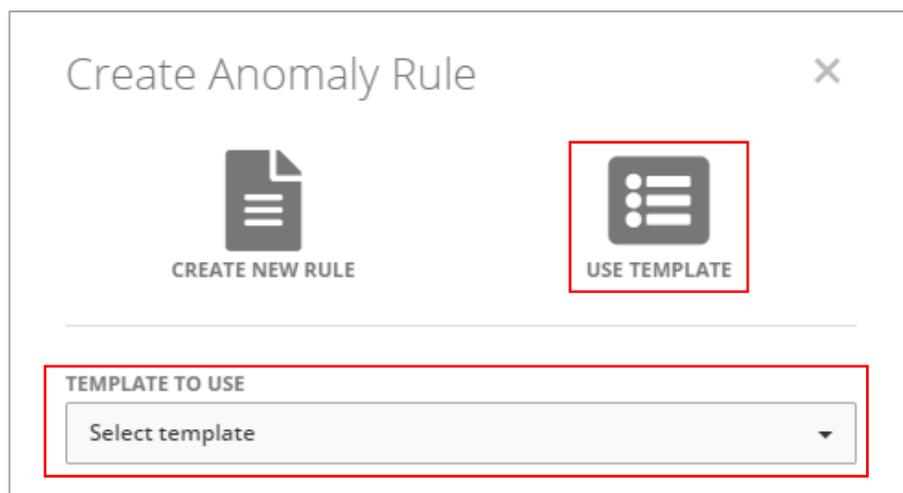

Create Anomaly Rule

CREATE NEW RULE

USE TEMPLATE

TEMPLATE TO USE

Select template

Teramind comes with many anomaly rules templates. You can choose from a list of types such as: Applications, Emails, File Operations etc.

Check out the [Appendix](#) section for a list of all the prebuilt anomaly rule templates available in Teramind.

10 Enforcing the Rules

10.1 Automatic Enforcement

When you create a new rule, by default it's automatically turned on. You can edit a rule even when it's running. Any changes you make to the rule will be enforced immediately if the user is online and connected to the Teramind server or as soon as they connect.

 It's always a good idea to test a rule when you create or edit it to see if it's working as intended. You can do so by checking the [Alerts Report](#).

Rules are enforced depending on what type of Teramind Agent is installed on the user's computer:

If the user is using a Stealth Agent:

- **Regular Rules:** The rule will be enforced according to any [Rule Schedule](#) you have setup or for 24/7 if no such schedule exists. The rule will be enforced even if the user is offline or disconnected from the Teramind server.
- **Anomaly Rules:** Since an anomaly rule does not have a schedule, it will run for 24/7.

If the user is using a Revealed Agent:

- **Regular Rules:** The rule will only be enforced when the user has logged in to the Agent and clicked the **Start** button to begin their shift. The rule will still follow any [Rule Schedule](#) you have setup. The rule will continue to be enforced until the user clicks the **Stop** button to end their shift or as soon as the rule schedule has ended – whichever comes first.
- **Anomaly Rules:** Since an anomaly rule does not have a schedule, it will run until the user clicks the **Stop** button on the Revealed Agent.

10.2 Manual Enforcement

You can manually turn a rule on/off from the Teramind Dashboard. To do so:

- **Regular Rules:** You can manually control the rules from the *Behavior Policies* screen. To access the *Behavior Policies* screen, click the **BEHAVIOR > Policies** menu.



Use the ON/OFF button next to a rule's name to turn it on or off. You can also use the ON/OFF button next to the Policy's name for which the rule is a part of. If you turn off the policy, all rules under the policy will be deactivated even if the individual rules are turned on. If the policy is turned on, the rules that has the ON status will be activated and the OFF rules will remain inactive.

- **Anomaly Rules:** The only way to turn off an anomaly rule is to remove it from the *Anomaly rules* screen. To access the *Anomaly rules* screen, click the **BEHAVIOR > Anomaly rules** menu.

RULES	CONDITIONS	APPLIES TO	ACTIONS
Webpages Anomalies	Webpages Time (%) > 7 Notify	All employees	  
File upload anomaly	Files: Web-upload operation Threshold count > 3 Notify	All employees	  

Click the **X** button besides an anomaly rule to remove it.


11 Investigating the Rule Violation Incidents

There are multiple ways you can investigate rule violation incidents on Teramind.

11.1 Using the Behavioral Alerts Report

This is your primary source to view all rule violation incidents. You can use the Alerts report to view a list of rule violation incidents with all the necessary details, such as: the date/time the incident happened, the user or activity involved and other pertinent information. You can also view a session recording of an alert, export the alerts report or schedule it for auto delivery to selected email addresses.


You can access the Alerts report from the **BI Reports > Behavior Alerts** menu, under the **Basic** tab.

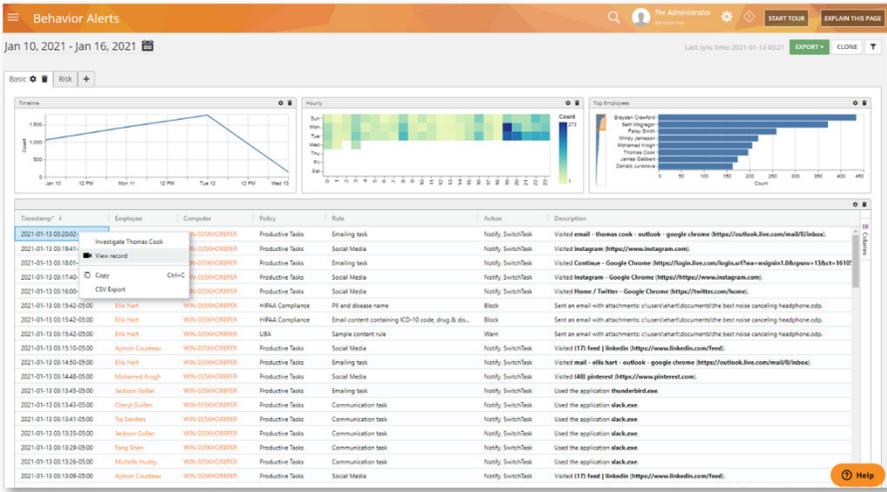

For more information on the Alerts report and to learn how to use its different features, check out the [BI Reports > Behavior Alerts](#) section on the Teramind User Guide.

11.1.1 Using the BI Report's Investigate / View Record Feature

On the Behavior Alerts screen, you will see a table/grid widget. If you right-click on row, you will see a pop-up menu:

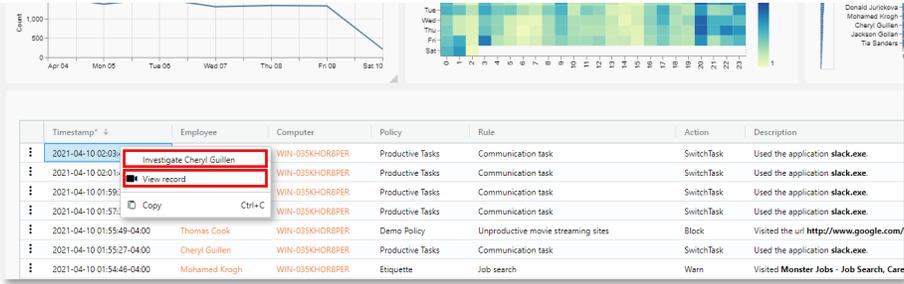

1. Click the **Investigate** option from the pop-up menu to view the [Employee's Activity Monitoring Report](#) report. From that report, you can see all the alerts for the employee under the **Alerts** tab.

2. Click the **View record** option to view the [Session Recording](#) of the employee at the selected timestamp.

11.2 Using the Alerts Log Widget

You can also add an Alerts Log widget to your dashboard. The widget allows you to view the most recent alerts in real-time or for the selected date range. You can add the Alerts Log widget to a dashboard by clicking the **ADD WIDGETS** button on the **Dashboard's** screen.




For more information on the Widgets and to learn how to use them, check out the [Widgets](#) sections on the Teramind User Guide.

11.3 Using the Session Player

Session Player allows you to view a user's desktop in live view or history playback mode. You can precisely locate when a rule violation incident occurred, check out all the alert notifications the user received and investigate the trail of user activities leading up to the incident. If the user is online, you can take remote control of their computer or freeze their inputs to prevent further incidents.

If Audio recording is enabled, you can also hear recordings of both sound outputs and inputs (speakers/line-out, microphone/line-in). Finally, you can take snapshots of the user's desktop, forward the recordings to select email addresses or download them as MP4 files.

You can access the Session Player from the [BI Reports](#), from the [Employee's Activity Monitoring Report](#) or even from the [Dashboards](#). Click the **Movie Camera**  icon, wherever you see it, to access the Session Player.

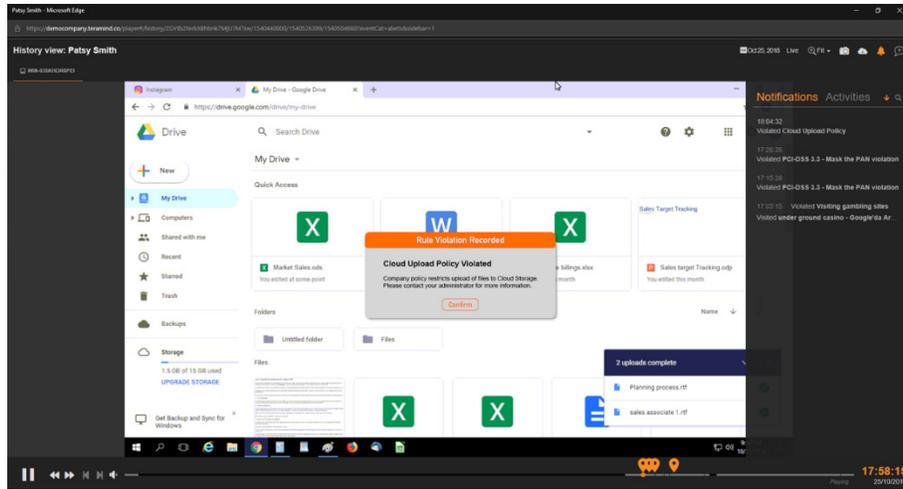


For more information on the Session Player and to learn how to use its different features, check out the [Session Player](#) section on the Teramind User Guide.

11.4 Using the Risk Report

The Risk report allows you to analyze the impact of rule violation incidents and the risks they pose to your organization. The report shows top risky rules, users, applications and websites. You can drill-down each risk category to further investigate what caused the risk level to change. You can also plot the risk trend by department, severity, number of violations, tag etc. Unique risk scores help you identify high-risk rules or users so that plans can be developed for treating the risks.


You can access the Alerts report from the **BI Reports > Behavior Alerts** menu, under the **Risk** tab.

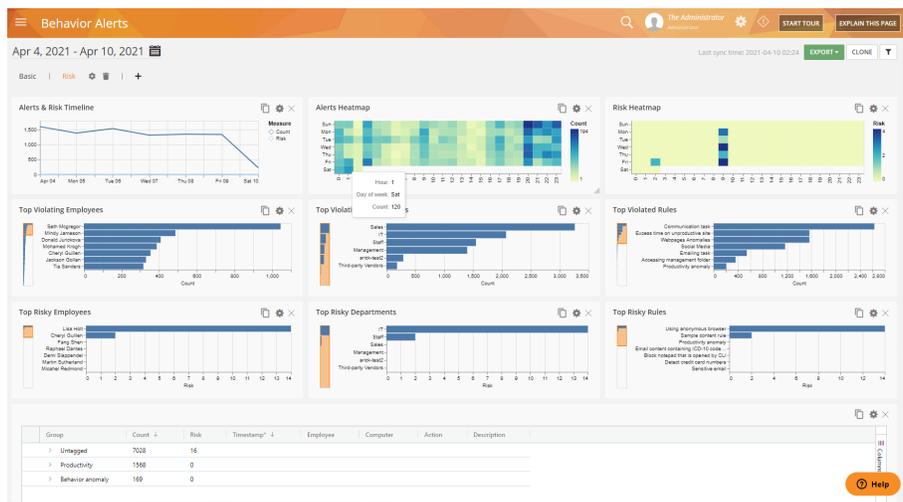

For more information on the Risk report and to learn how to use its different features, check out the [BI Reports > Behavior Alerts](#) section on the Teramind User Guide.

11.5 Using the Risk Widget

You can also add a Risk widget to your dashboard. The widget allows you to view the most recent risk trend and risk scores for users, activities or rules in real-time or for the selected date range. You can add the Risk widget to a dashboard by clicking the **ADD WIDGETS** button on the **Dashboard's** screen.

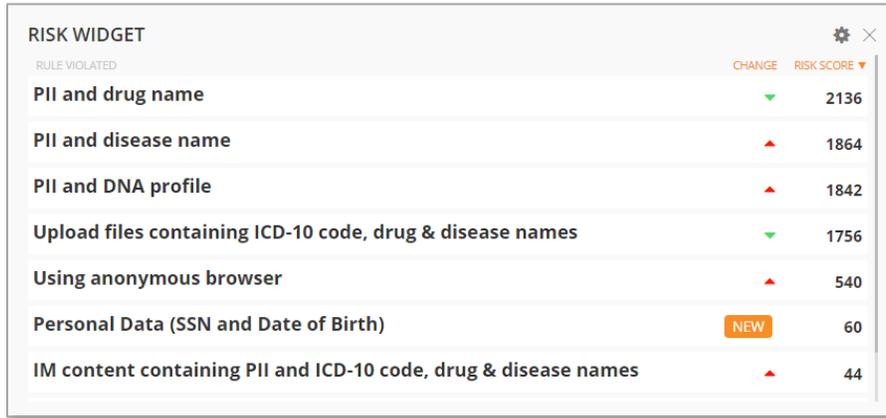

The screenshot shows a 'RISK WIDGET' interface. It features a table with columns for 'RULE VIOLATED', 'CHANGE', and 'RISK SCORE'. The 'CHANGE' column uses green downward arrows for a decrease and red upward arrows for an increase. The 'RISK SCORE' column shows numerical values. A 'NEW' badge is present next to the 'Personal Data (SSN and Date of Birth)' row. The widget title 'RISK WIDGET' is at the top left, and there are settings and close icons at the top right.

RULE VIOLATED	CHANGE	RISK SCORE
PII and drug name	▼	2136
PII and disease name	▲	1864
PII and DNA profile	▲	1842
Upload files containing ICD-10 code, drug & disease names	▼	1756
Using anonymous browser	▲	540
Personal Data (SSN and Date of Birth)		60
IM content containing PII and ICD-10 code, drug & disease names	▲	44

For more information on the Widgets and to learn how to use them, check out the [Widgets](#) sections on the Teramind User Guide.

12 Sample Rules Walkthrough


12.1 Rule Sample 1: User logs in during off hours

12.1.1 Rule Summary



This example shows how you can create an Agent Schedule rule to detect a user attempting to login during off hours.

12.1.2 Setting up the Rule

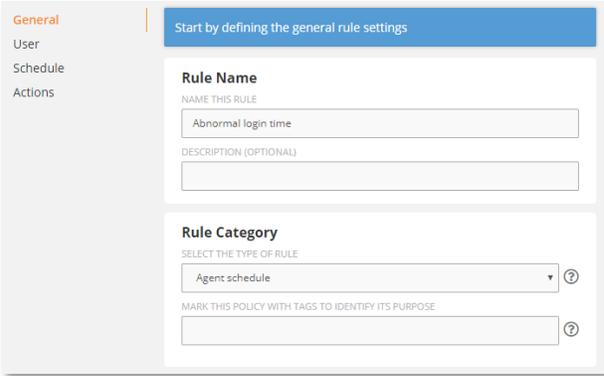


General

On the first tab, General, we assigned a name for the rule and a description.

We have chosen an Agent Schedule rule type since we are looking to detect a user’s login time.

To learn more:

- [Agent Schedule Rules: What Schedule Violations Can You Detect?](#)
- [Understanding Common Rule Elements](#) - names, description, tags, schedule etc.

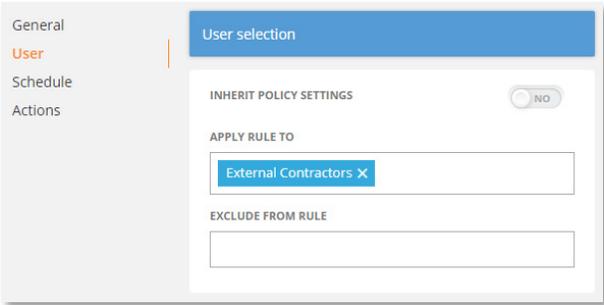

User

For the users, we choose to manually add the users (by turning off the INHERIT POLICY SETTINGS). We also decided to apply this rule to external contractors only. To do so, we first created a department named ‘External Contractors’ and then edited the selected users’ profiles and assigned them to this department.

To learn more:

- [Defining Users](#)

- [Creating/Editing Departments](#)
- [Creating/Editing Employee Profiles](#)

Schedule

We have selected the Login schedule violation type so that we can monitor the login attempts.

We have also setup two time slots that will be considered as off-hours (12am-8am and 6pm-12am). Any attempt to login in these two periods will trigger the rule.

If you wanted, you could setup additional options such as restricted IPs or exclude any days you don't want to monitor.

To learn more:

- [Rule Criteria](#) – for Agent Schedule rules

Actions


Finally, for the last tab, 'Actions', we have selected to use a NOTIFY action to notify the security admin and WARN action to show a warning to the offending user. For this last action, we decided to use the HTML template option to make the alert prominent to the user.

To learn more:

- [Defining Rule Actions](#)
- [Customizing the Rules Messages and Alerts](#)

12.1.3 Viewing the Rule Alerts

Click **BI Reports** > **Behavior Alerts** then select the **Basic** tab to view a report of all rule violation alerts and trends. The 'Grid Widget' located below the screen shows a list of all the alerts:

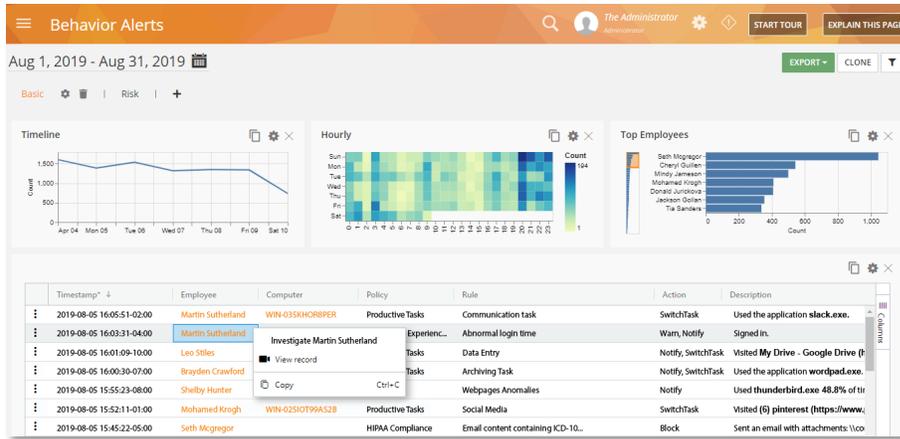


You can see that, on 2019-08-05 at 16:03:31, employee Martin Sutherland signed in. Since the action meets the rule criteria (Login: between 12am – 8am and 6pm – 12am), it is triggered.

Right-click on that row and then select **View record** to view the Session Recording of the alert.

12.1.4 Viewing the Session Recording


Here you can see the [Session Recording](#) of how the rule message will look on the user's desktop:

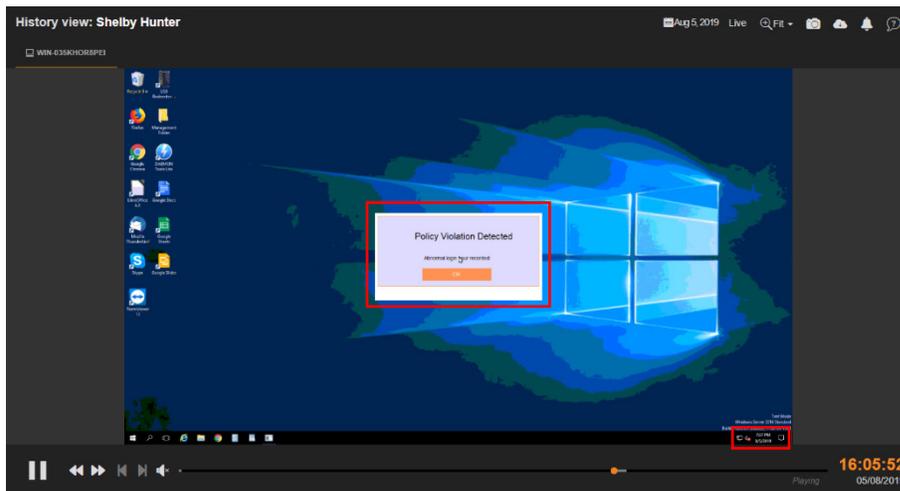

When a user logs in outside our set schedule, they will see a warning message. Note that, the login time is based on the user's local time.


12.2 Rule Sample 2: User sending emails with attachments to non-business address

12.2.1 Rule Summary

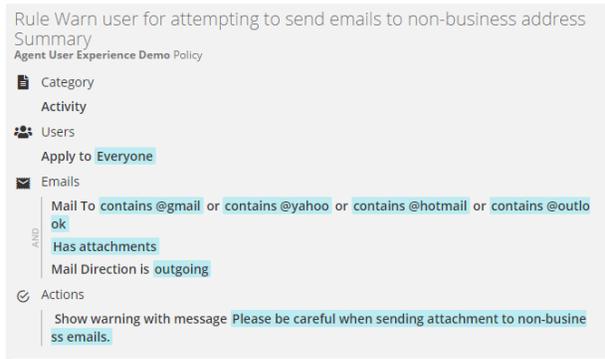

This example shows how you can create a simple Activity rule to warn a user when they send an email with attachment(s) to a non-business email address.

12.2.2 Setting up the Rule

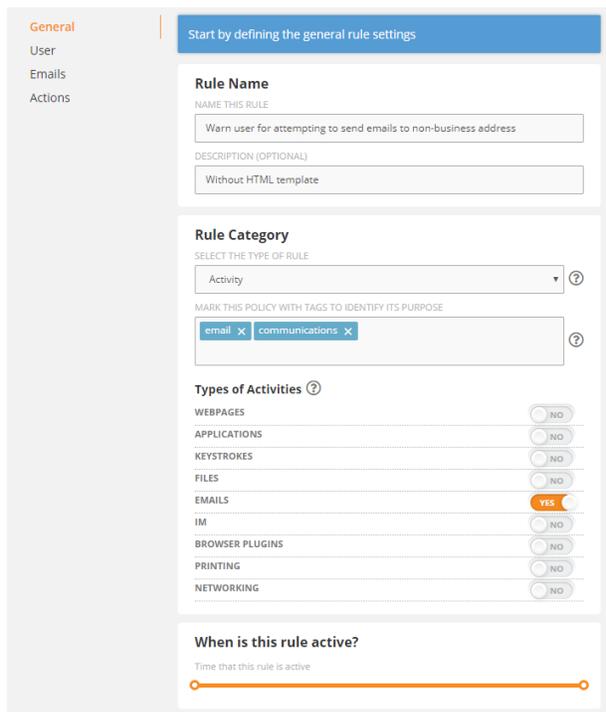

General


On the first tab, General, we assigned a name for the rule and a description. We also used some tags to identify the rule easily.

We have chosen an Activity rule type since we are looking to detect a user action (the act of sending an email) and not any content. We have selected **Emails** as the *Types of Activities*.

We left the rule schedule to its default 24-hour setting.

To learn more:

- [Activity Rules: What Activities Can You Detect?](#)
- [Emails](#)– emails activity rule
- [Understanding Common Rule Elements](#) - names, description, tags, schedule etc.

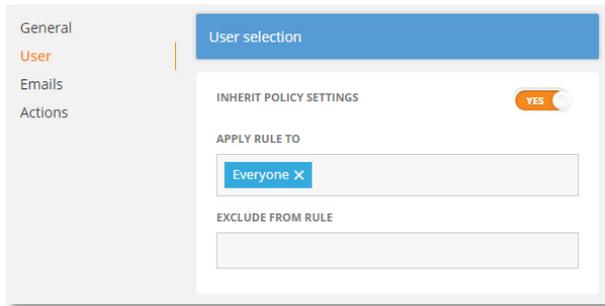


User

For the users, we used the default policy settings (by leaving the INHERIT POLICY SETTINGS option turned on).

To learn more:


- [Defining Users](#)

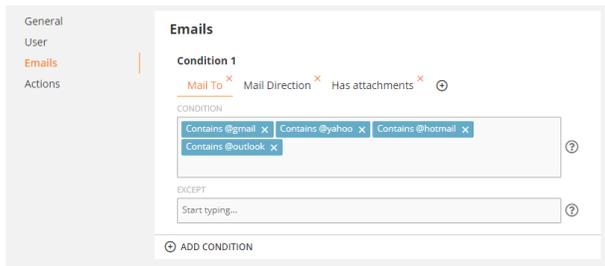

Emails

Mail To

We have added three criteria to the Emails activity. For the first criterion, 'Mail to', we have specified several email domains that we would consider as 'non-business' addresses and used a *contains* logic to detect even a partial match.

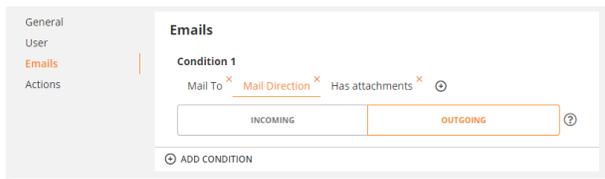

Mail Direction

For the second criterion, 'Mail Direction', we have selected OUTGOING to detect only the outgoing emails.




Has Attachments

For the second criterion, 'Mail Direction', we have selected OUTGOING to detect only the outgoing emails.

To learn more:

- [Rule Conditions](#)
- [Rule Logic](#)

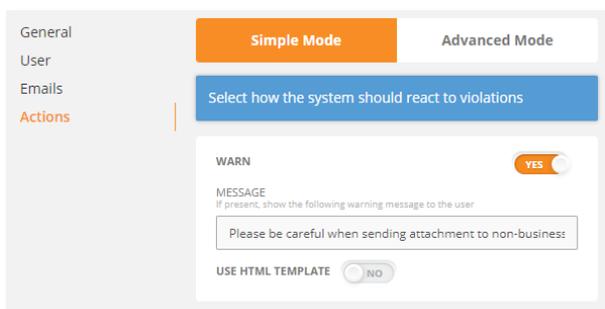

Actions


Finally, for the last tab, 'Actions', we have selected to use a WARN action to just show a simple warning to the user.

To learn more:

- [Defining Rule Actions](#)

12.2.3 Viewing the Rule Alerts

Click **BI Reports > Behavior Alerts** then select the **Basic** tab to view a report of all rule violation alerts and trends. The 'Grid Widget' located below the screen shows a list of all the alerts:

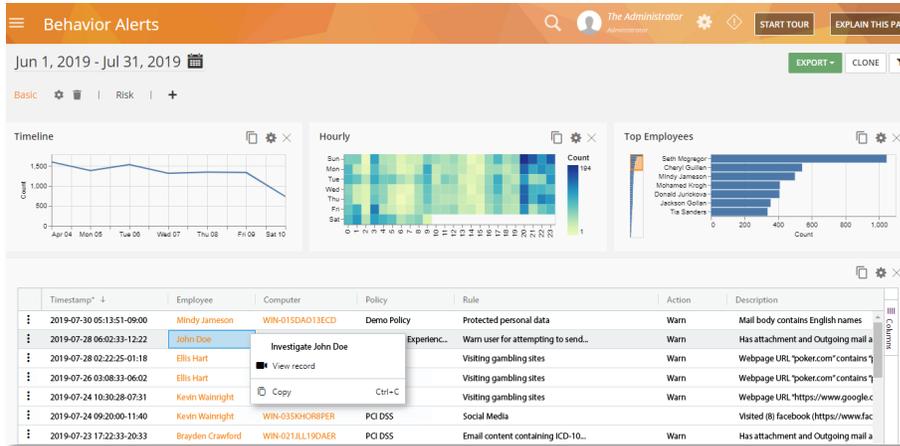


You can see that, on 2019-07-28 at 06:02:33, employee John Doe sent an outgoing email to a non-business email account and the rule gets triggered.

Right-click on that row and then select **View record** to view the Session Recording of the alert.

12.2.4 Viewing the Session Recording

Here you can see the [Session Recording](#) of how the rule message will look on the user's desktop:

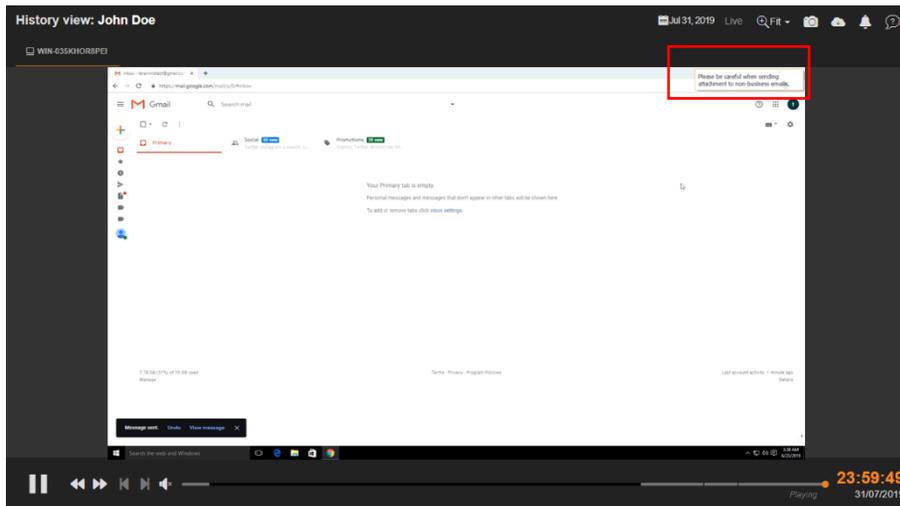


You can see that, as soon as the user sends an email to a non-business address, the rule's warning message is shown on the top-right corner of their screen.

You will notice that the message is very bare-bone and may fail to attract any attention. You can change that by [customizing the rule messages and alert](#).


12.3 Rule Sample 3: User attempting to upload a sensitive file to a cloud drive

12.3.1 Rule Summary

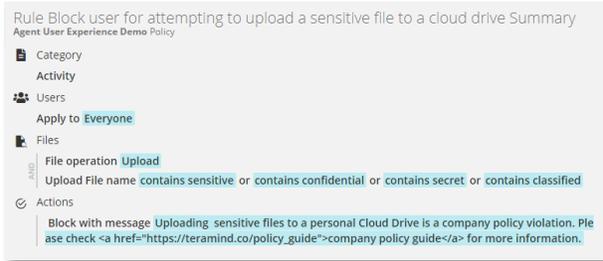

This example shows how you can create an Activity rule to block a user and display a message for attempting to upload certain files to a cloud drive.

12.3.2 Setting up the Rule

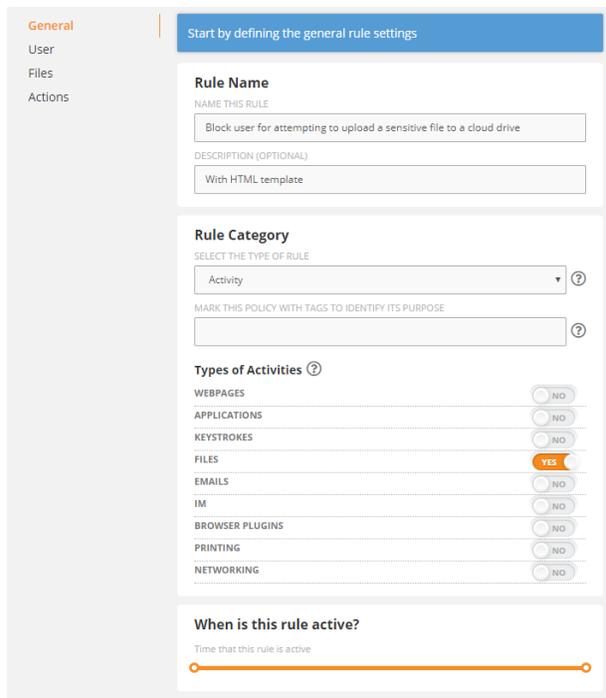

General


On the first tab, General, we assigned a name for the rule and a description.

We have chosen an Activity rule type since we are looking to detect a user action (the act of uploading a file) and not any content. And we have selected **Files** as the *Types of Activities*.

We left the rule schedule to its default 24-hour setting.

To learn more:

- [Activity Rules: What Activities Can You Detect?](#)
- [Files](#)– files activity rule
- [Understanding Common Rule Elements](#) - names, description, tags, schedule etc.

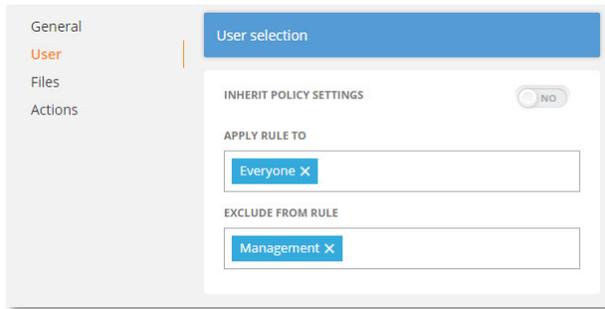


User

For the users, we choose to manually add the users (by turning off the INHERIT POLICY SETTINGS). We have also excluded the Management department from the rule's scope.

To learn more:


- [Defining Users](#)

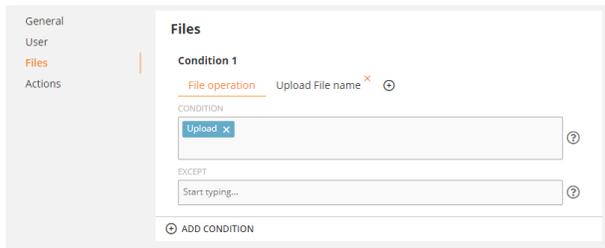

Files

File Operation

We have added two criteria to the Files activity. For the first criterion, 'File Operation', we have selected the *Upload* operation.

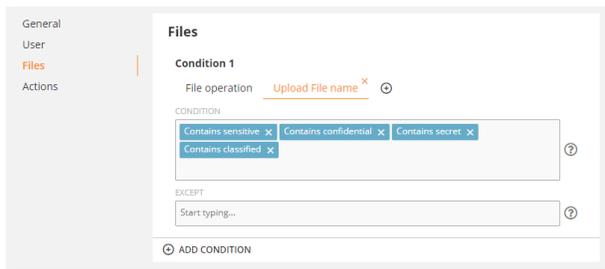


Upload File Name

For the second criterion, 'Upload File Name', we have specified some keywords that we would like to detect in the file names.

To learn more:

- [Rule Conditions](#)
- [Rule Logic](#)

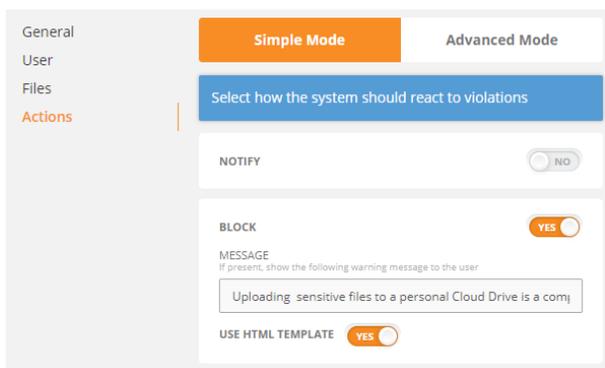

Actions


Finally, for the last tab, 'Actions', we have selected a BLOCK action to block the activity and at the same time show a message to the user. For this demonstration, we used a HTML template. This will allow us to use a customized template. We can also use simple HTML tags (such as , <a> etc.) in the message itself.

To learn more:

- [Defining Rule Actions](#)
- [Customizing the Rules Messages and Alerts](#)

12.3.3 Viewing the Rule Alerts

Click **BI Reports > Behavior Alerts** then select the **Basic** tab to view a report of all rule violation alerts and trends. The 'Grid Widget' located below the screen shows a list of all the alerts:

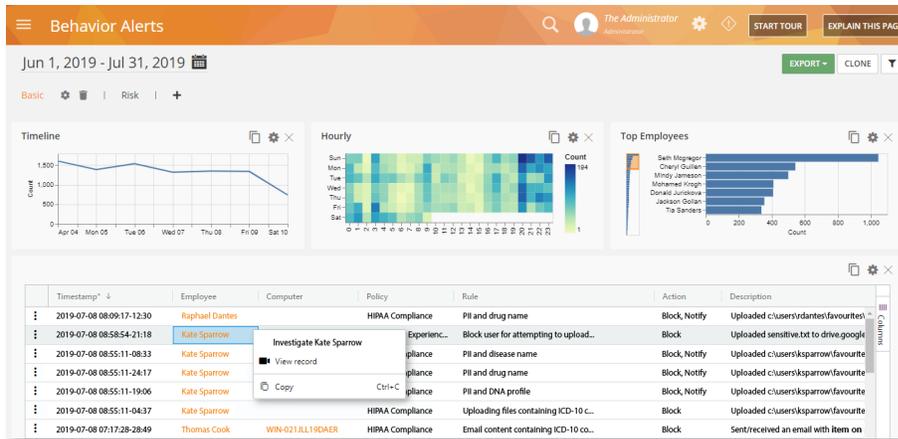


You can see that, on 2019-07-08 at 08:58:54, employee Kate Sparrow tried to upload a file to Google Drive and the rule blocked her action.

Right-click on that row and then select **View record** to view the Session Recording of the alert.

12.3.4 Viewing the Session Recording

Here you can see the [Session Recording](#) of how the rule message will look on the user's desktop:

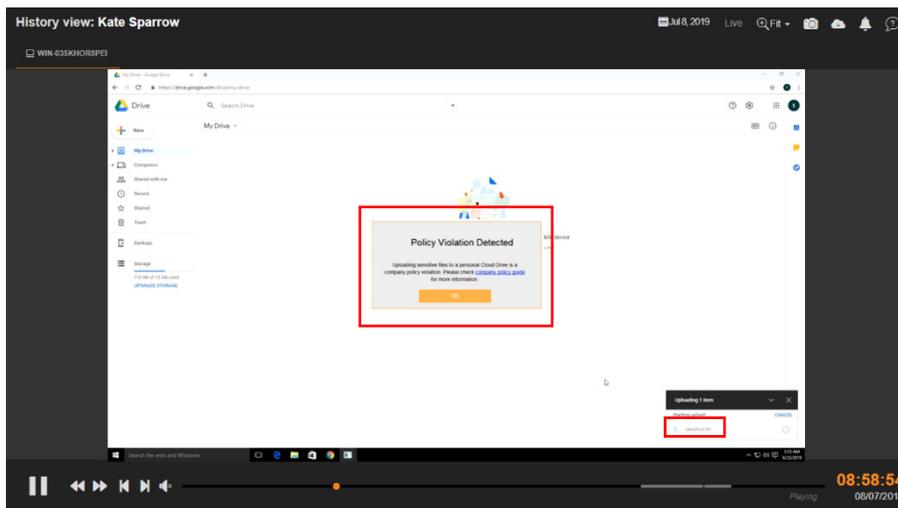


You can see that, as soon as the user attempts to upload a file named 'sensitive.txt' the rule is triggered as the filename contains one of our specified keywords, 'sensitive'.

The rule shows the message we specified, and the upload operation is blocked.


12.4 Sample Rule 4: User attempting to share files containing sensitive content

12.4.1 Rule Summary

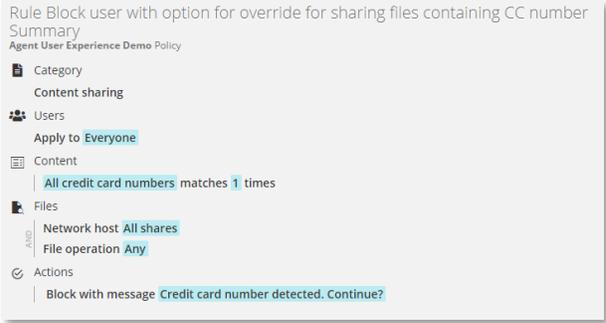

This example shows how you can create a Content rule to block a user and display a message for attempting to upload a file containing credit card numbers. The user will be able to override the block action by clicking a ‘Yes’ button or cancel the operation by clicking a ‘No’ button. In any case, a rule alert will be recorded.

12.4.2 Setting up the Rule

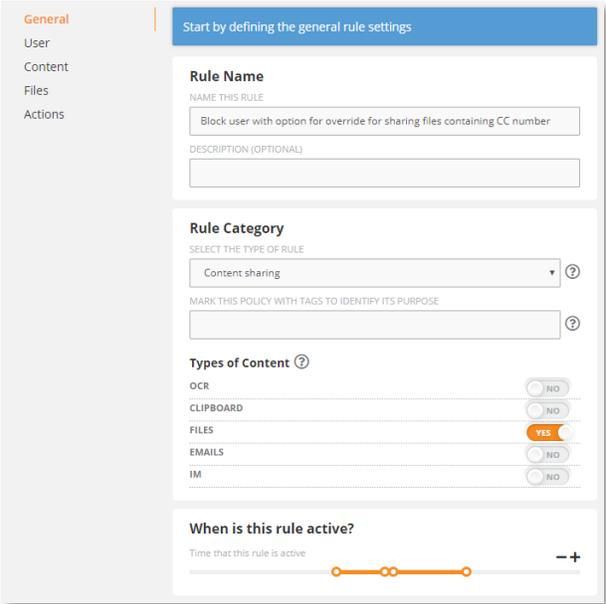

General


On the first tab, General, we assigned a name for the rule and a description.

We have chosen a Content Sharing rule type since we are interested in detecting sensitive content. We have selected **Files** as the *Types of Content*.

We changed the rule schedule so that it will monitor 9am-12pm and 12:30pm-5:00pm, a typical worktime taking into account a 30-minute launch break.

To learn more:

- [Content Sharing Rules: What Contents Trigger the Rules?](#)
- [Files](#)– files content sharing rule
- [Understanding Common Rule Elements](#) - names, description, tags, schedule etc.

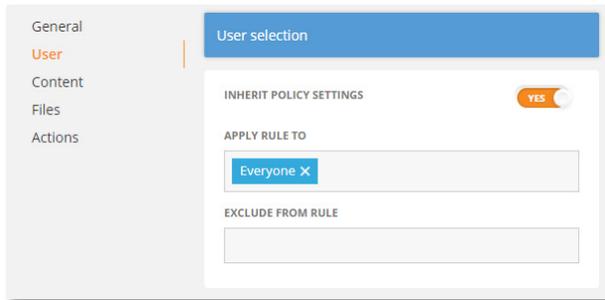


User

For the users, we used the default policy settings (by leaving the INHERIT POLICY SETTINGS option turned on).


To learn more:

- [Defining Users](#)

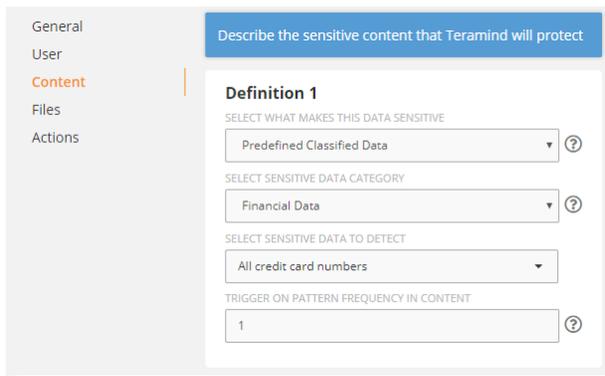

Content

For content, we used a built-in template, 'Predefined Classified Data' and then selected the 'Financial Data' category to detect 'All credit card numbers'. The rule will trigger even if there's only one credit card number detected in a file. We did so by entering a value of '1' in the TRIGGER ON PATTERN FREQUENCY IN CONTENT field.

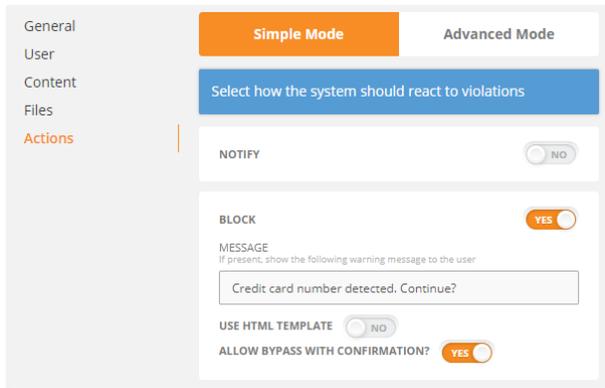

Actions


Finally, for the last tab, 'Actions', we have selected a BLOCK action. This will show a warning to the user and block the action.

To learn more:

- [Defining Rule Actions](#)

12.4.3 Viewing the Rule Alerts

Click **BI Reports** > **Behavior Alerts** then select the **Basic** tab to view a report of all rule violation alerts and trends. The 'Grid Widget' located below the screen shows a list of all the alerts:

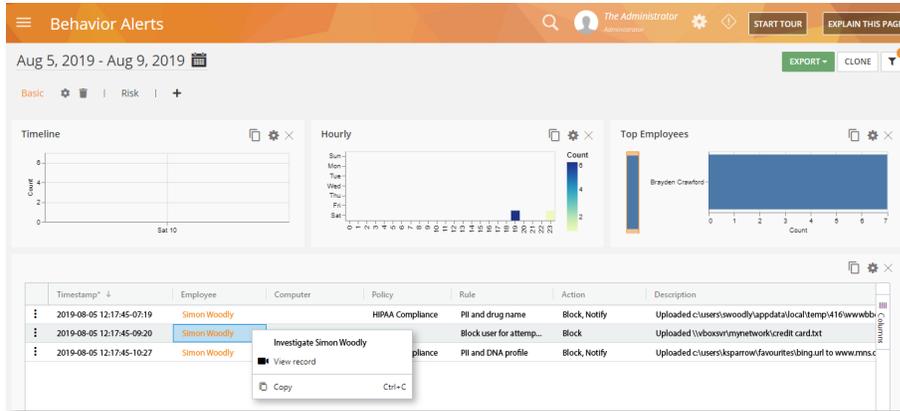


You can see that, on 2019-08-05 at 12:17:45, employee Simon Woody tried to upload a file containing credit card data to a Box drive and the rule got triggered.

Right-click on that row and then select **View record** to view the Session Recording of the alert.

12.4.4 Viewing the Session Recording

Here you can see the [Session Recording](#) of how the rule message will look on the user's desktop:

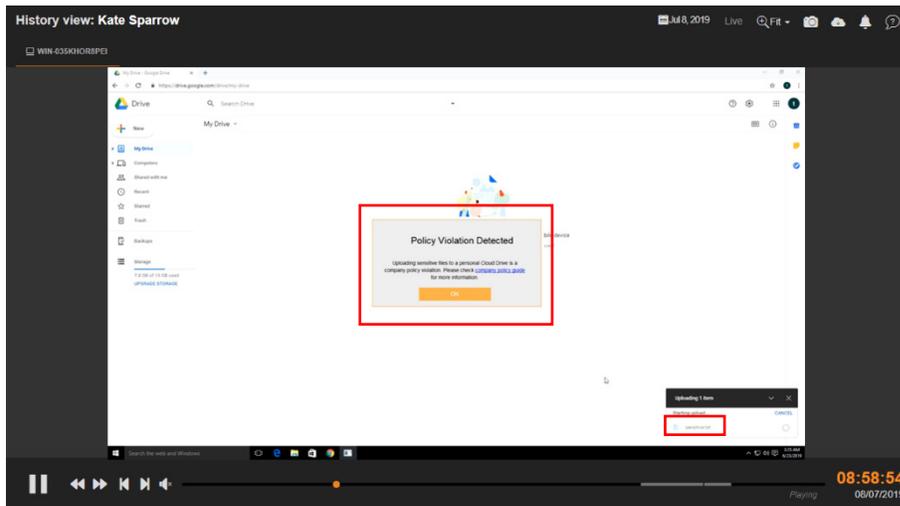

You can see that, as soon as the user attempts to upload a file named 'sensitive.txt' the rule is triggered as the filename contains one of our specified keywords, 'sensitive'.

The rule shows the message we specified, and the upload operation is blocked.

12.5 Sample Rule 5: Employee productivity anomaly

12.5.1 Rule Summary

This example shows how you can create an Anomaly rule to monitor the productivity level of employees and receive a notification when it goes below a certain threshold. You will also be able to compare this against their Departmental and Organizational average.

12.5.2 Setting up the Rule

GENERAL SETTINGS

RULE NAME
Define this rule's name
Declining productivity

APPLIES TO
Select the users or groups that will be subject to this rule
All employees X

EXCLUDING
Select the users or groups that will be excluded from this rule
Add employees or departments

TAGS Optional
Select or create custom tags to classify this rule
productivity X

General Settings

On the first section, General Settings, we assigned a name for the rule and a description.

For the users, we have selected All employees.

We have also used a tag to find the rule easily.

To learn more:

- [Creating Anomaly Rules](#)
- [Setting Up the Rule Basics](#) - names, description, user, tags etc.

RULE TRIGGER

WHAT TRIGGERS THE RULE
Select the action which the rule will be built upon
Activity: Productivity

CONDITIONS
Select parameters for this rule
Productivity < 20 *

[ADD CONDITION](#)

Rule Trigger

We chose the 'Activity: Productivity' as the rule trigger.

For the rule's condition, we selected the *Productivity* criterion and chose a less than '<' logic to detect when the productivity goes below 20%.

To learn more:

- [Detection Criteria - What Behavioral Anomalies Trigger the Rules?](#)
- [List of Prebuilt Anomaly Rule Templates](#)

RULE RISK LEVEL

RISK
Select the degree of risk for violating this rule
No Risk Low Moderate High Critical


ACCUMULATES RISK
Whether this rule should be counted multiple times per day on multiple violations
YES

Risk Level

We left the risk level's default settings (No Risk) and ACCUMULATES RISK option turned on so that multiple violations of the rule will add up towards the risk score for this rule.

To learn more:

- [Setting the Risk Level in an Anomaly Rule](#)

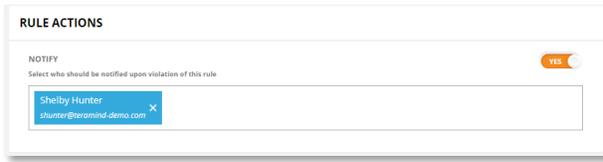

Actions


Finally, for the last section, 'Actions', we have turned on the NOTIFY action to inform a manager about the productivity loss.

To learn more:

- [Defining Rule Actions](#)

12.5.3 Viewing the Rule Alerts

Click **BI Reports > Behavior Alerts** then select the **Basic** tab to view a report of all rule violation alerts and trends. The 'Grid Widget' located below the screen shows a list of all the alerts:

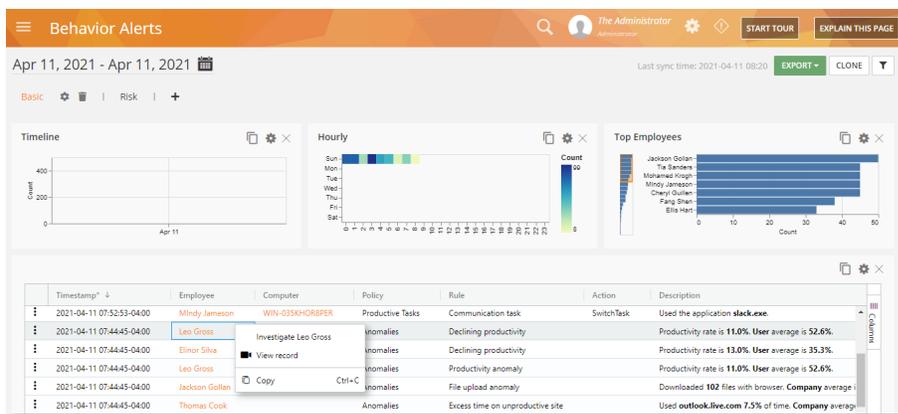


You can see that, on 2021-04-11 at 04:44:45, employee Leo Gross triggered an anomaly rule due to his productivity dropping to 11% where his usual productivity was above 52% before.

Right-click on that row and then select **View record** to view the Session Recording of the alert.

12.5.4 Viewing the Session Recording

Here you can see the [Session Recording](#) of how the rule message will look on the user's desktop:

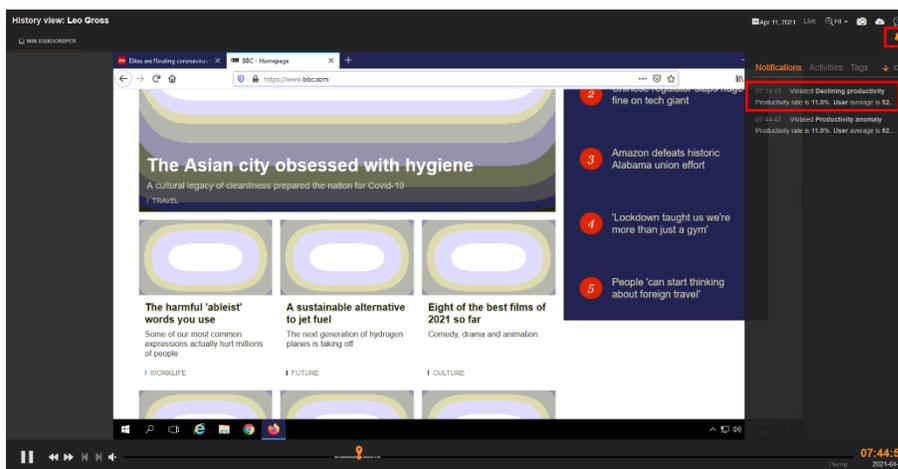

You can click the **Notification** icon near the top-right corner of the Session Player to see all the alerts/notifications.

Click a **Notification** to see what the user was doing when the rule was triggered.

13 Appendix

13.1 List of Prebuilt Rule Templates

<p>Data Loss Prevention</p> <ul style="list-style-type: none">Credit Card Number: WideCredit Card Number: NarrowCredit Card Number: At least 50 numbersCredit Card Magnetic Strip Data: WideCredit Card Magnetic Strip Data: NarrowCredit Card Magnetic Strip Data: 50 Track1 entitiesOffice Document: Confidential WatermarkCredit Card Magnetic Strip Data: 50 entitiesHealth Data: Disease or Drug namesHealth Data: Drug names or NDC identifiersPersonal Data: US SSN and Date of BirthHealth Data: US SSN with Health InformationHealth Data: UK NHS Numbers and Medical Information <p>Emails</p> <ul style="list-style-type: none">Outbound email with social security numberOutgoing email to non-business addressEmail contains a CVOutgoing email w-attachment to non-business addressEmail contains accusative sentimentEmail contains angry sentimentEmail contains discouraged sentimentEmail contains dissatisfied sentimentEmail contains lawsuit threatEmail contains profanityEmail contains sexual harassment contentEmail contains unresponsive complaintIncoming email from competitorsOutbound email with attachmentOutbound email with credit card numberOutbound email with sensitive keywords <p>Keystrokes</p> <ul style="list-style-type: none">Screenshot taken <p>Printer</p> <ul style="list-style-type: none">Large print job	<p>Application</p> <ul style="list-style-type: none">Anonymous browser detectedMSIExec program installation or removalNetwork sniffer launchedNon-whitelisted application executedRegistry editor launchedRunning peer-to-peer file sharing applicationsRunning screen sharing applicationsSnipping tool used <p>File Operations</p> <ul style="list-style-type: none">Access sensitive filesDriver tamperingHosts file editedProgram installationWrite to cloud drive (native)Write to config fileWrite to removable mediaCopy file from RDPCopy file from RDP to removable media <p>Websites</p> <ul style="list-style-type: none">Non-whitelisted website accessedAdult websitesExcessive time on job search websitesExcessive usage of social mediaGaming or gambling sitesStreaming movies <p>IMs</p> <ul style="list-style-type: none">IM contains accusative sentimentIM contains angry sentimentIM contains discouraged sentimentIM contains dissatisfied sentimentIM contains lawsuit threatIM contains sexual harassment contentIM contains unresponsive complaint
---	--

13.2 List of Prebuilt Anomaly Rule Templates

<p>Applications Application usage anomaly</p> <p>Emails Outgoing email anomaly Outgoing email attachments anomaly</p> <p>File Operations External storage insertion anomaly File copy anomaly File creation anomaly File delete anomaly File rename anomaly Files downloaded by browser anomaly Files downloaded by cloud client anomaly Files uploaded by browser anomaly Files uploaded by cloud client anomaly</p> <p>Instant Messages Instant messages count anomaly</p>	<p>Networking Network connection count (no https) anomaly Network connection count anomaly Network data in (no https) anomaly Network data in anomaly Network data out (no https) anomaly Network data out anomaly</p> <p>Printers Documents printed count anomaly</p> <p>User Activity Idle time anomaly User productivity rate anomaly</p> <p>Websites Website usage anomaly</p>
--	--

13.3 List of Pre-Defined Classified Data

Financial Data

<p>All Credit Card Numbers Magnetic Data Magnetic Data (Track 1) Magnetic Data (Track 2) Swift Code ABA Route Numbers</p> <p>By Type Visa Mastercard American Express Bankcard Dinners International Dinners USA & Canada Discover En Route JCB Maestro Switch</p>	<p>USA Visa Mastercard American Express Bankcard Dinners International Dinners USA & Canada Discover En Route JCB Maestro</p> <p>Japan Visa Mastercard American Express JCB Maestro</p>	<p>Europe Visa Mastercard American Express Discover Maestro Switch Solo</p> <p>United Kingdom Visa Mastercard American Express Discover Maestro Switch Solo</p> <p>Canada</p>
---	---	--

Solo RuPay By Country USA Japan Israel Europe United Kingdom Canada	Israel Visa Mastercard American Express JCB Maestro	Visa Mastercard American Express Dinners Discover Maestro
--	---	--

Health Data

Common Drug Names Common Disease Names DNA Profiles	NDC Number HICN	NHS Number ICD10 Code
---	--------------------	--------------------------

Personally Identifiable Data

USA Zip Code and Address UK Postal Code and Address USA Cities SSN English Names	Dates Phone Numbers IPv4 Addresses IPv6 Addresses Email Addresses	URL VIN Personal Cryptographic Keys USA Vehicle License Plates USA Driver License Number (All States)
--	---	---

Code Snippets

Clang C++ C# Go	Haskell Java JavaScript Objective-C	PHP Python Ruby SQL
--------------------------	--	------------------------------